




Dealers Industrial Equipment

No.:

Date: 23-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

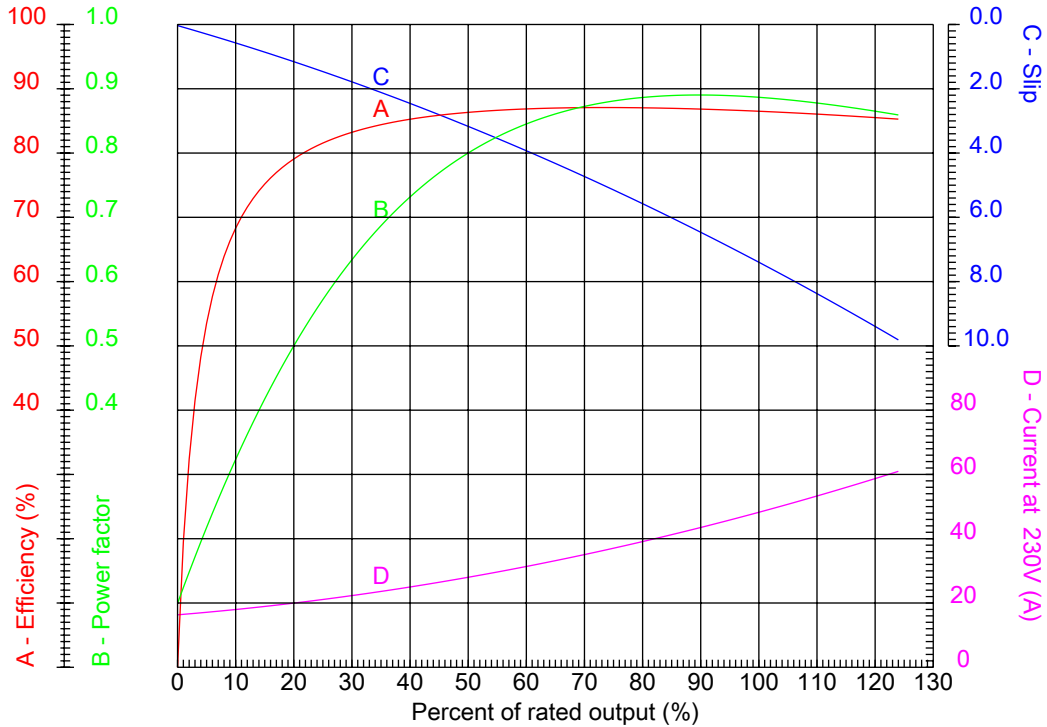

Customer :
Product line : Oil Well Pumping : High Slip - NEMA Design "D" - ODP

Frame : 286T	Locked rotor current (I _l /I _n) : 6.0
Output : 20 HP	Duty cycle : S1
Frequency : 60 Hz	Service factor : 1.00
Full load speed : 1110 rpm	Design : D
Voltage : 208-230/460 V	Locked rotor torque : 280 %
Rated current : 54.2-49.0/24.5 A	Breakdown torque : 0 %
Insulation class : F	

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #02012OS3EOW286T

Performed by

Checked