




Dealers Industrial Equipment

No.:

Date: 23-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

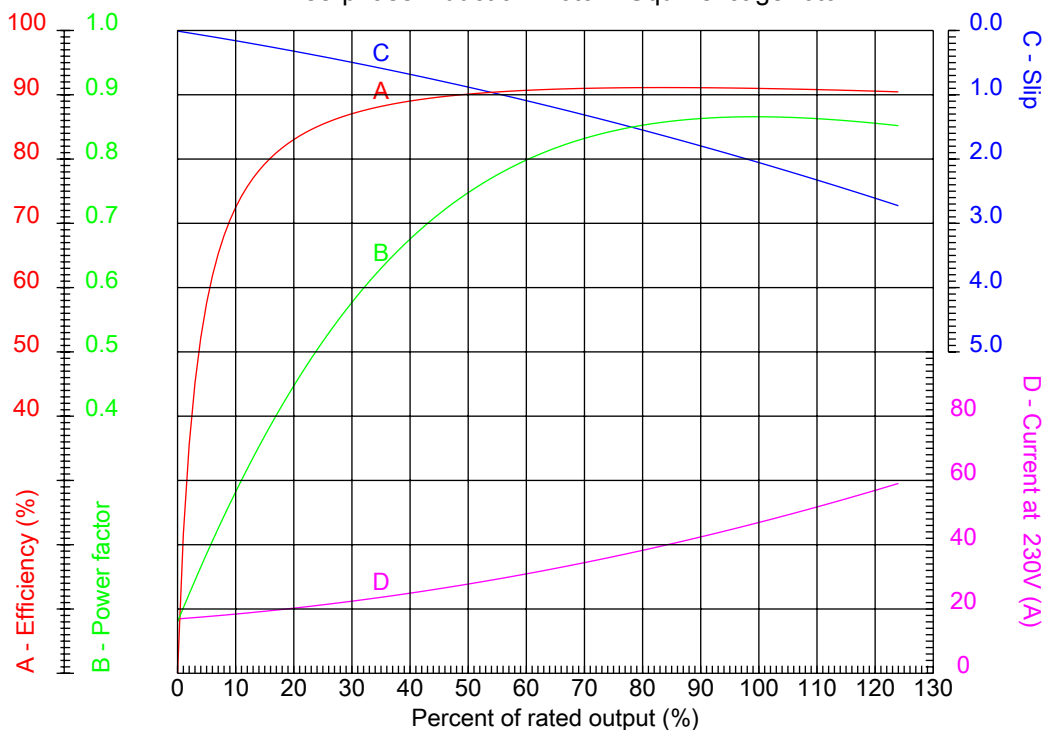

Customer :
Product line : W01 (Rolled Steel) Close Coupled Pump ODP - JM Type

| | | | |
|------------------|--------------------|--|---------|
| Frame | : 254/6JM | Locked rotor current (I _l /I _n) | : 6.0 |
| Output | : 20 HP | Duty cycle | : S1 |
| Frequency | : 60 Hz | Service factor | : 1.15 |
| Full load speed | : 3525 rpm | Design | : B |
| Voltage | : 208-230/460 V | Locked rotor torque | : 180 % |
| Rated current | : 52.6-47.6/23.8 A | Breakdown torque | : 240 % |
| Insulation class | : F | | |

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #02036OT3E254JM-SG

Performed by

Checked