




# Dealers Industrial Equipment

No.:

Date: 23-SEP-2016

## PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

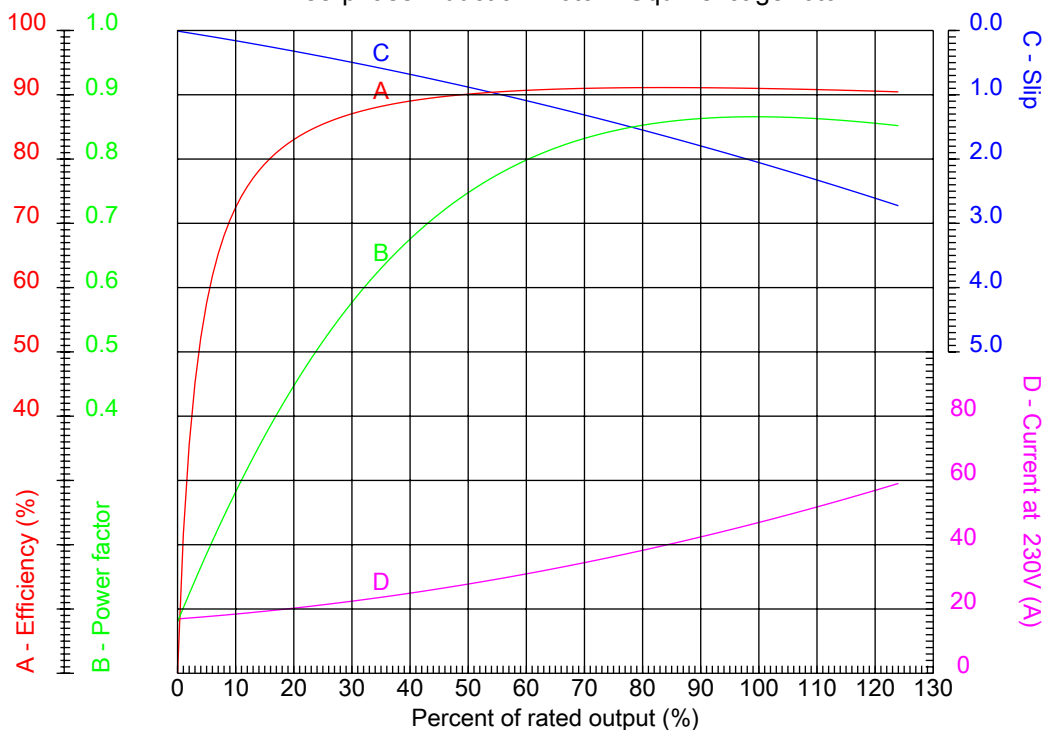

Customer :  
 Product line : W01 (Rolled Steel) General Purpose ODP

|                  |                    |  |         |
|------------------|--------------------|--|---------|
| Frame            | : 254/6T           | Locked rotor current (I <sub>l</sub> /I <sub>n</sub> ) | : 6.0   |
| Output           | : 20 HP            | Duty cycle   | : S1    |
| Frequency        | : 60 Hz            | Service factor   | : 1.15  |
| Full load speed  | : 3525 rpm         | Design   | : B     |
| Voltage          | : 208-230/460 V    | Locked rotor torque                                    | : 180 % |
| Rated current    | : 52.6-47.6/23.8 A | Breakdown torque                                       | : 240 % |
| Insulation class | : F                |  |         |

Notes:  
 Downloaded from <http://dealerselectric.com>  
 Generated for Model #02036OT3E254T-SG

Performed by

Checked