




# Dealers Industrial Equipment

No.:

Date: 23-SEP-2016

## PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

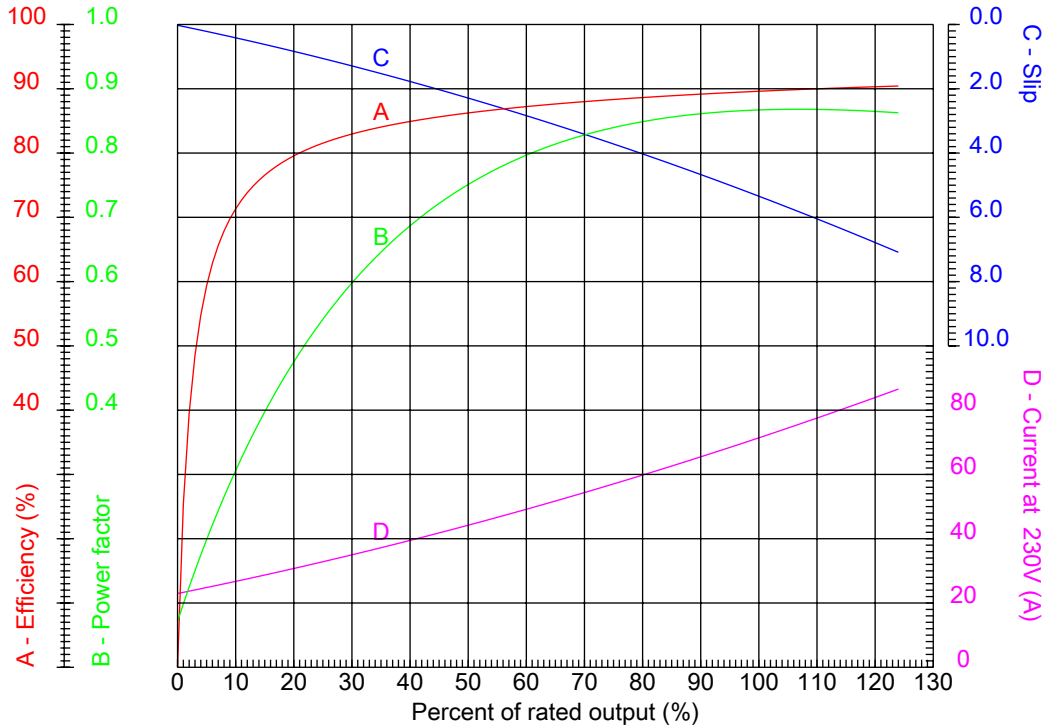

Customer :  
 Product line : Oil Well Pumping : High Slip - NEMA Design "D" - TEFC (IP55)

Frame : 326T	Locked rotor current (I <sub>l</sub> /I <sub>n</sub> ) : 6.8
Output : 30 HP	Duty cycle : S1
Frequency : 60 Hz	Service factor : 1.15
Full load speed : 1135 rpm	Design : D
Voltage : 208-230/460 V	Locked rotor torque : 320 %
Rated current : 78.5-71.0/35.5 A	Breakdown torque : 0 %
Insulation class : F	

Notes:  
 Downloaded from <http://dealerselectric.com>  
 Generated for Model #03012ES3EOW326T

Performed by

Checked