




Dealers Industrial Equipment

No.:

Date: 23-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

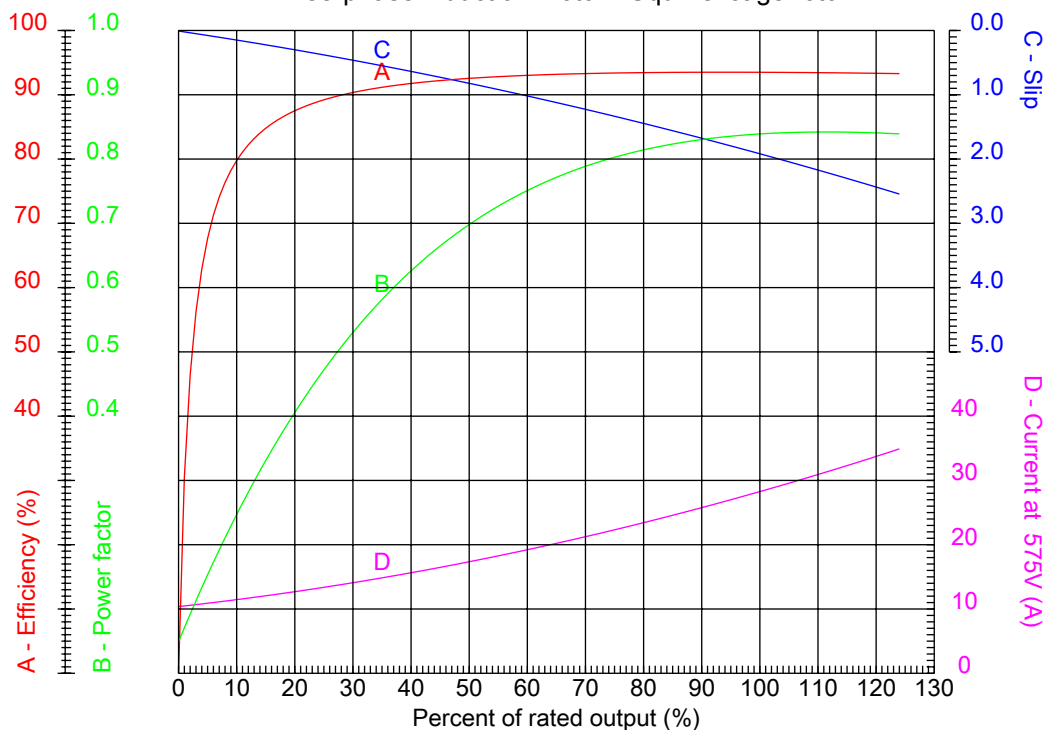

Customer :
Product line : W22 Cooling Tower Motors: NEMA Premium - TEAO

| | |
|----------------------------|--|
| Frame : 284/6T | Locked rotor current (I _L /I _n) : 6.1 |
| Output : 30 HP | Duty cycle : S1 |
| Frequency : 60 Hz | Service factor : 1.25 |
| Full load speed : 1765 rpm | Design : B |
| Voltage : 575 V | Locked rotor torque : 240 % |
| Rated current : 28.1 A | Breakdown torque : 240 % |
| Insulation class : F | |

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #03018AT3HCT286TF1-W2

Performed by

Checked