




Dealers Industrial Equipment

No.:

Date: 27-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

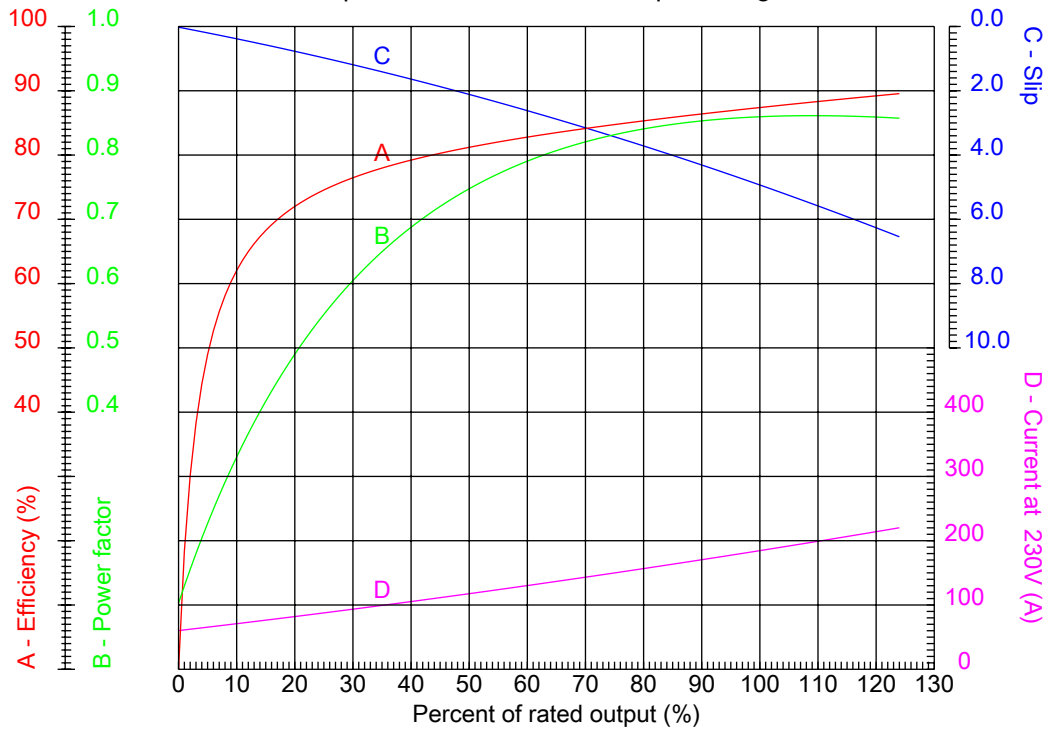

Customer :
Product line : Oil Well Pumping : High Slip - NEMA Design "D" - TEFC (IP55)

Frame : 444T	Locked rotor current (I _l /I _n) : 5.5
Output : 75 HP	Duty cycle : S1
Frequency : 60 Hz	Service factor : 1.15
Full load speed : 1140 rpm	Design : D
Voltage : 208-230/460 V	Locked rotor torque : 300 %
Rated current : 199-185/92.5 A	Breakdown torque : 0 %
Insulation class : F	

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #07512ES3EOW444T

Performed by

Checked