




Dealers Industrial Equipment

No.:

Date: 27-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

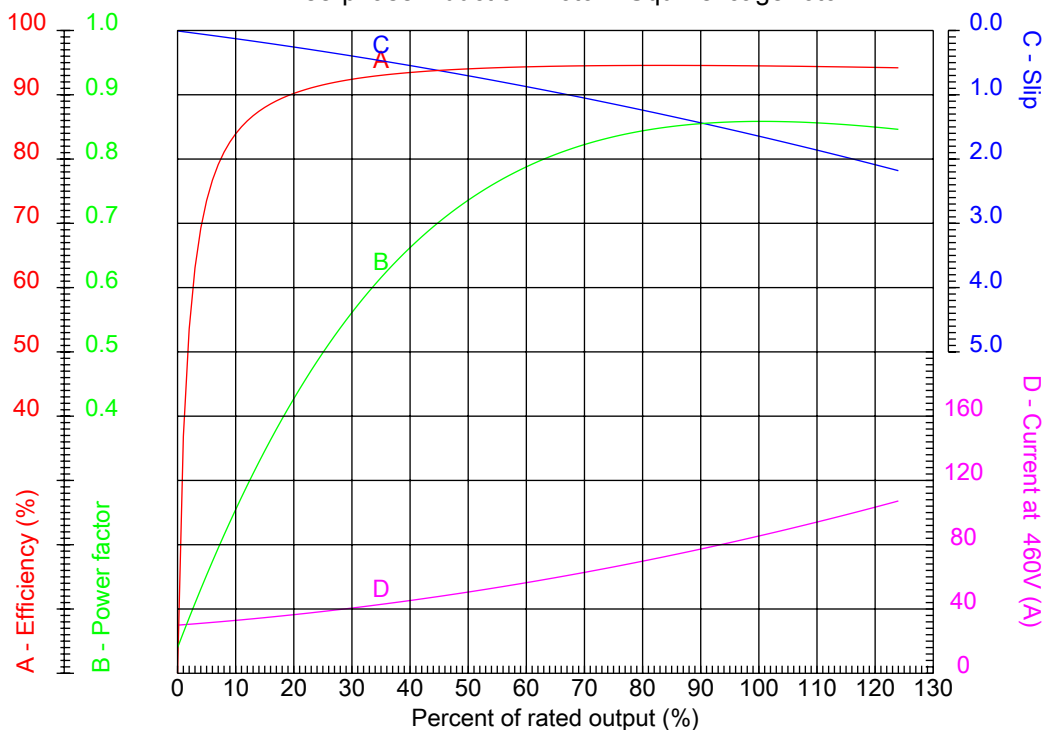

Customer :
Product line : W22 NEMA Premium - Roller Bearings

| | |
|----------------------------|--|
| Frame : 404/5T | Locked rotor current (I _L /I _n) : 6.4 |
| Output : 75 HP | Duty cycle : S1 |
| Frequency : 60 Hz | Service factor : 1.25 |
| Full load speed : 1180 rpm | Design : B |
| Voltage : 460 V | Locked rotor torque : 200 % |
| Rated current : 84.9 A | Breakdown torque : 230 % |
| Insulation class : F | |

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #07512ET3GRB405T-W22

Performed by

Checked