




Dealers Industrial Equipment

No.:

Date: 28-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

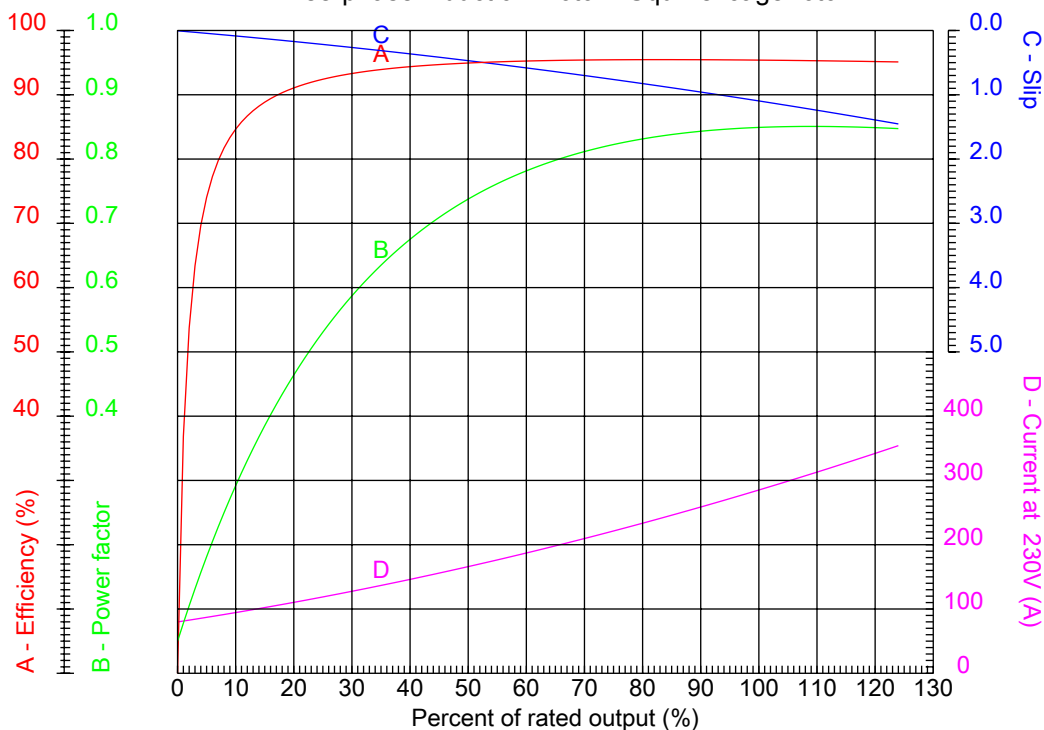

Customer :
 Product line : W22 NEMA Premium - Roller Bearings

| | |
|-------------------------------|--|
| Frame : 444/5T | Locked rotor current (I _l /I _n) : 6.5 |
| Output : 125 HP | Duty cycle : S1 |
| Frequency : 60 Hz | Service factor : 1.15 |
| Full load speed : 1780 rpm | Design : B |
| Voltage : 208-230/460 V | Locked rotor torque : 200 % |
| Rated current : 307-278/139 A | Breakdown torque : 230 % |
| Insulation class : F | |

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #12518ET3ERB444T-W22

Performed by

Checked