




# Dealers Industrial Equipment

No.:

Date: 29-SEP-2016

## PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

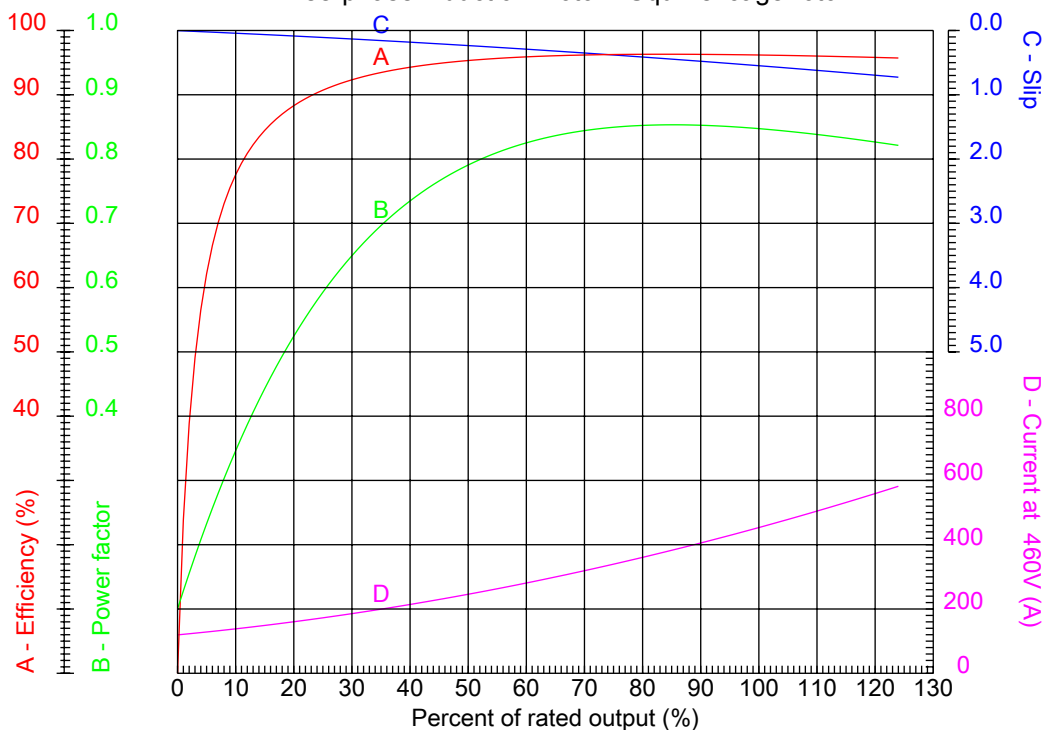

Customer :  
Product line : Three-Phase : Explosion Proof - NEMA Premium

|                  |            |  |         |
|------------------|------------|--|---------|
| Frame            | : 586/7T   | Locked rotor current (I <sub>l</sub> /I <sub>n</sub> ) | : 6.4   |
| Output           | : 400 HP   | Duty cycle   | : S1    |
| Frequency        | : 60 Hz    | Service factor   | : 1.15  |
| Full load speed  | : 1790 rpm | Design   | : B     |
| Voltage          | : 460 V    | Locked rotor torque                                    | : 180 % |
| Rated current    | : 460 A    | Breakdown torque                                       | : 200 % |
| Insulation class | : F        |  |         |

Notes:  
Downloaded from <http://dealerselectric.com>  
Generated for Model #40018XT3G586/7

Performed by

Checked