



Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

Customer :

TECHNICAL PROPOSAL

Single-phase induction motor - Squirrel cage rotor

Product line : Single-Phase : NEMA 48 & 56 ODP - Start Capacitor

Catalog Number : .1218OS1BB48C

List Price : \$222

Notes:

Downloaded from <http://dealerselectric.com>

Generated for Model #.1218OS1BB48C

Performed by:

Checked:



# Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

## DATA SHEET Single-phase induction motor - Squirrel cage rotor

Customer :  
 Product line : Single-Phase : NEMA 48 & 56 ODP - Start Capacitor

Frame : B48  
 Output : 0.12 HP  
 Frequency : 60 Hz  
 Poles : 4  
 Full load speed : 1750 rpm  
 Slip : 2.78 %  
 Voltage : 115/208-230 V  
 Rated current : 3.20/1.50-1.60 A  
 Locked rotor current : 14.1/7.04 A  
 Locked rotor current (I<sub>L</sub>/I<sub>n</sub>) : 4.4  
 No-load current : 2.90/1.45 A  
 Full load torque : 0.355 lb.ft  
 Locked rotor torque : 340 %  
 Breakdown torque : 320 %  
 Design : ---  
 Insulation class : B  
 Temperature rise : 80 K  
 Locked rotor time : 6 s (hot)  
 Service factor : 1.40 (1.00 at 208V)  
 Duty cycle : S1  
 Ambient temperature : -20°C - +40°C  
 Altitude : 1000 m  
 Degree of Protection : IP21  
 Approximate weight : 18 lb  
 Moment of inertia : 0.02420 sq.ft.lb  
 Noise level : ---

	D.E.	N.D.E.
Bearings	6203 ZZ	6202 ZZ
Regreasing interval	---	---
Grease amount	---	---

Load	Power factor	Efficiency (%)
100%	0.52	48.1
75%	0.46	41.0
50%	0.40	33.0

Notes:  
 Downloaded from <http://dealerselectric.com>  
 Generated for Model #.1218OS1BB48C

Performed by

Checked




# Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

## PERFORMANCE CURVES RELATED TO RATED OUTPUT

Single-phase induction motor - Squirrel cage rotor

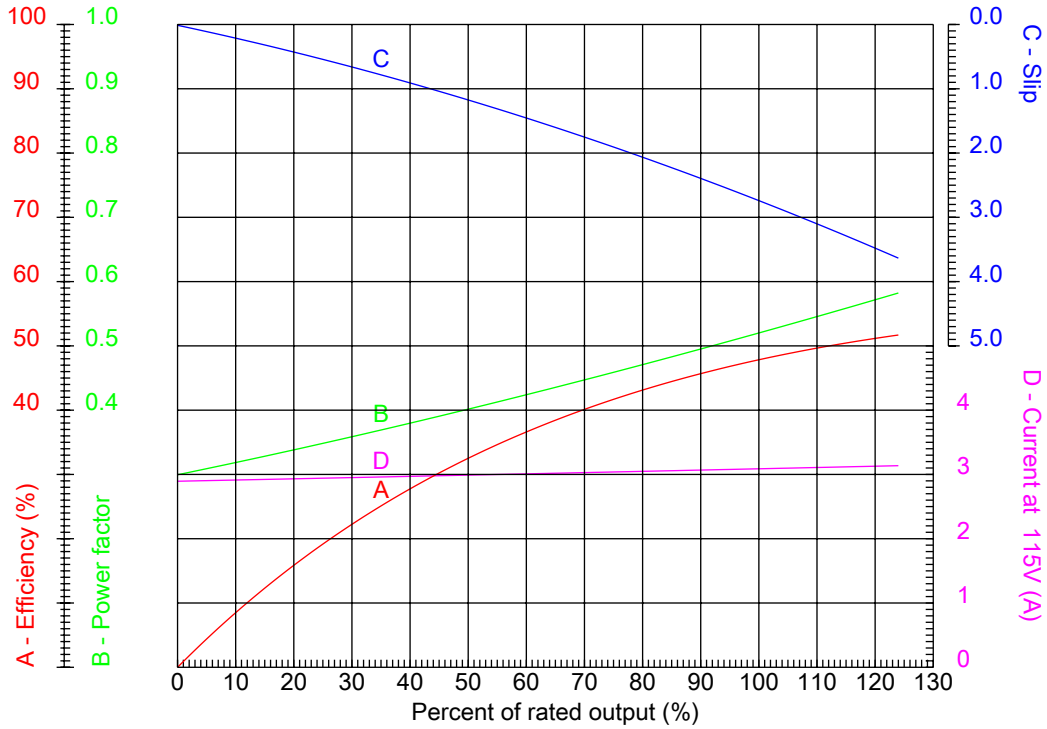


Customer :  
 Product line : Single-Phase : NEMA 48 & 56 ODP - Start Capacitor

Frame	: B48	Locked rotor current (I <sub>L</sub> /I <sub>n</sub> )	: 4.4
Output	: 0.12 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.40 (1.00 at 208V)
Full load speed	: 1750 rpm	Design	: ---
Voltage	: 115/208-230 V	Locked rotor torque	: 340 %
Rated current	: 3.20/1.50-1.60 A	Breakdown torque	: 320 %
Insulation class	: B		

Notes:  
 Downloaded from <http://dealerselectric.com>  
 Generated for Model #.1218OS1BB48C

Performed by

Checked

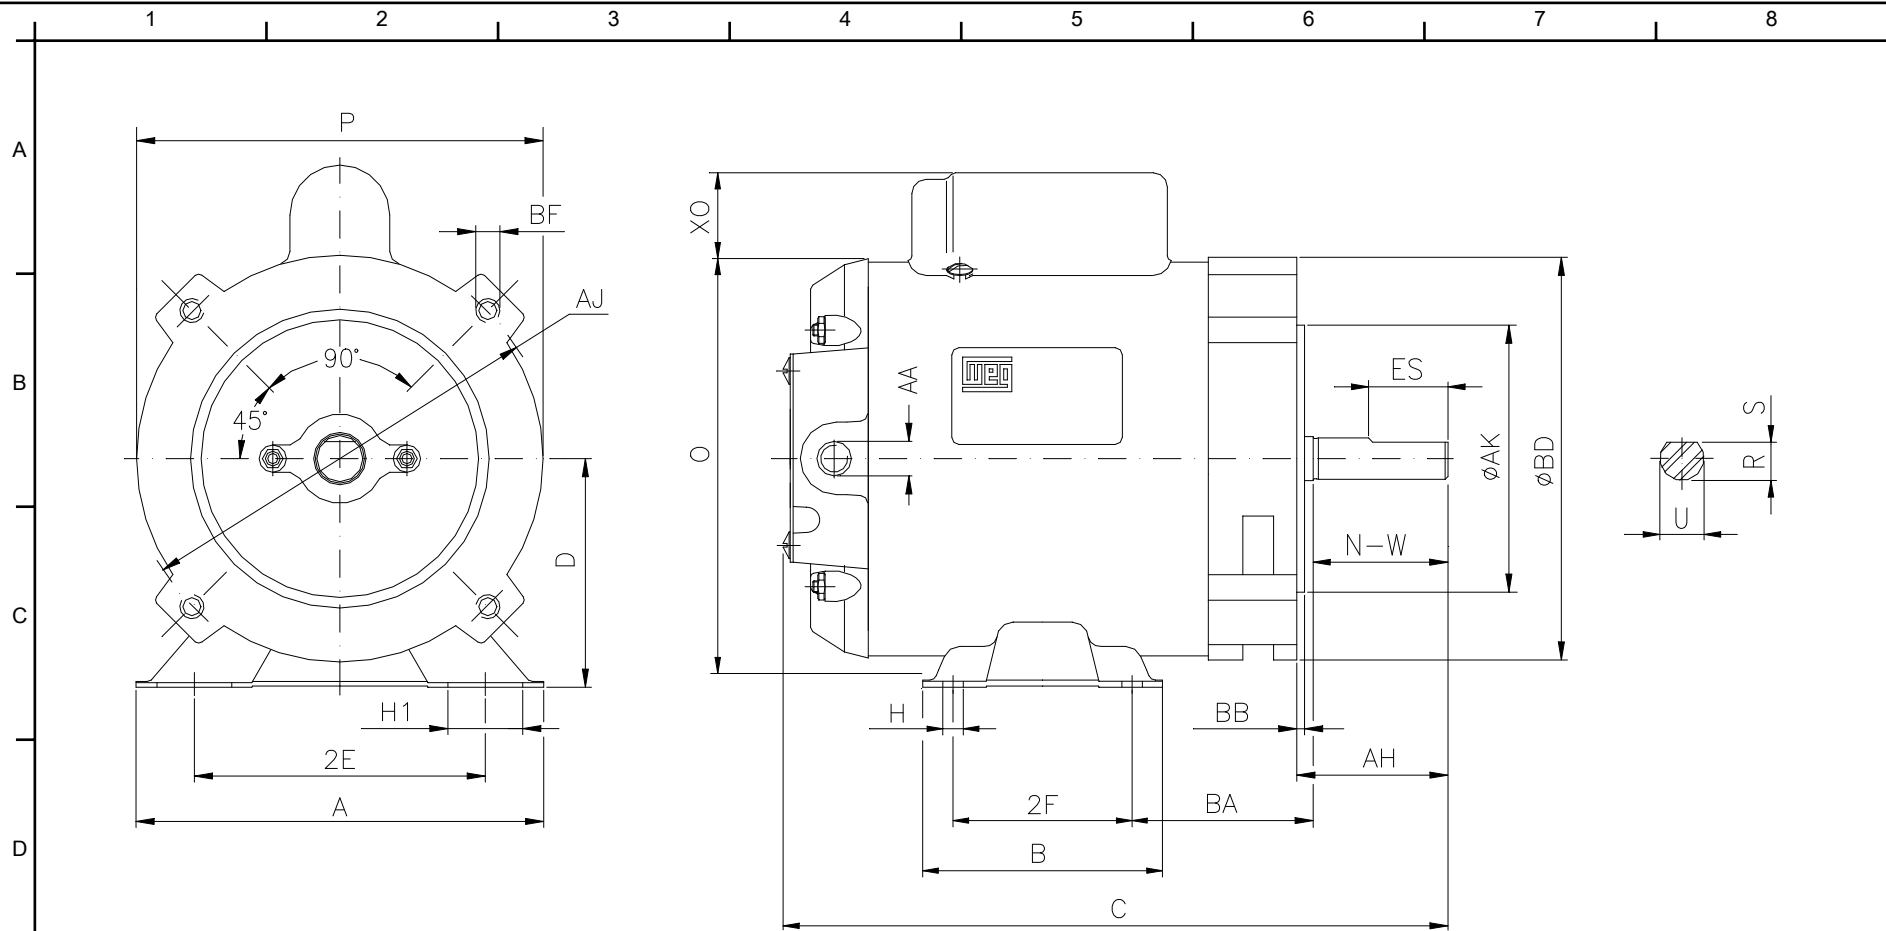

Notes: Downloaded from <http://dealerselectric.com>  
 Generated for Model #.1218OS1BB48C

Performed by:

Checked:

Customer:

Single-Phase : NEMA 48 & 56 ODP - Start Capacitor

Single-phase induction motor  
 Frame B48 - IP21

12-SEP-2016



2E 4.236	2F 2.748	H 0.342	H1 31	BA 2.500
A 6.142	B 3.543	C 9.409	D 3.000	O 5.905
XO 0.000	P 5.708	ES 1.260	N-W 1.500	U 0.5000
R 0.453	AA NPT 1/2"	AH 1.689	Flange FC-149	AJ 5.874
AK 4.500	BD 5.748	BF UNC 3/8"x16-2B	BB 0.157	