



Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

Customer :

TECHNICAL PROPOSAL

Single-phase induction motor - Squirrel cage rotor

Product line : Single Phase: W01 (Rolled Steel) - ODP - Premium Efficiency (DOE)

Catalog Number : .2518OT1BW56C-S

List Price : \$269

Notes:

Downloaded from <http://dealerselectric.com>

Generated for Model #.2518OT1BW56C-S

Performed by:

Checked:



Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

DATA SHEET Single-phase induction motor - Squirrel cage rotor

Customer :
 Product line : Single Phase: W01 (Rolled Steel) - ODP - Premium Efficiency (DOE)

Frame : W56
 Output : 0.25 HP
 Frequency : 60 Hz
 Poles : 4
 Full load speed : 1745 rpm
 Slip : 3.06 %
 Voltage : 115/208-230 V
 Rated current : 3.20/1.77-1.60 A
 Locked rotor current : 24.0/12.0 A
 Locked rotor current (I_L/I_n) : 7.5
 No-load current : 2.40/1.20 A
 Full load torque : 0.742 lb.ft
 Locked rotor torque : 290 %
 Breakdown torque : 300 %
 Design : ---
 Insulation class : F
 Temperature rise : 80 K
 Locked rotor time : 20 s (hot)
 Service factor : 1.35 (1.00 at 208V)
 Duty cycle : S1
 Ambient temperature : -20°C - +40°C
 Altitude : 1000 m
 Degree of Protection : ODP
 Approximate weight : 17 lb
 Moment of inertia : 0.03583 sq.ft.lb
 Noise level : 50 dB(A)

	D.E.	N.D.E.	Load	Power factor	Efficiency (%)
Bearings	6203 ZZ	6202 ZZ	100%	0.71	68.5
Regreasing interval	---	---	75%	0.65	62.0
Grease amount	---	---	50%	0.56	53.0

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #.2518OT1BW56C-S

Performed by

Checked




Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Single-phase induction motor - Squirrel cage rotor

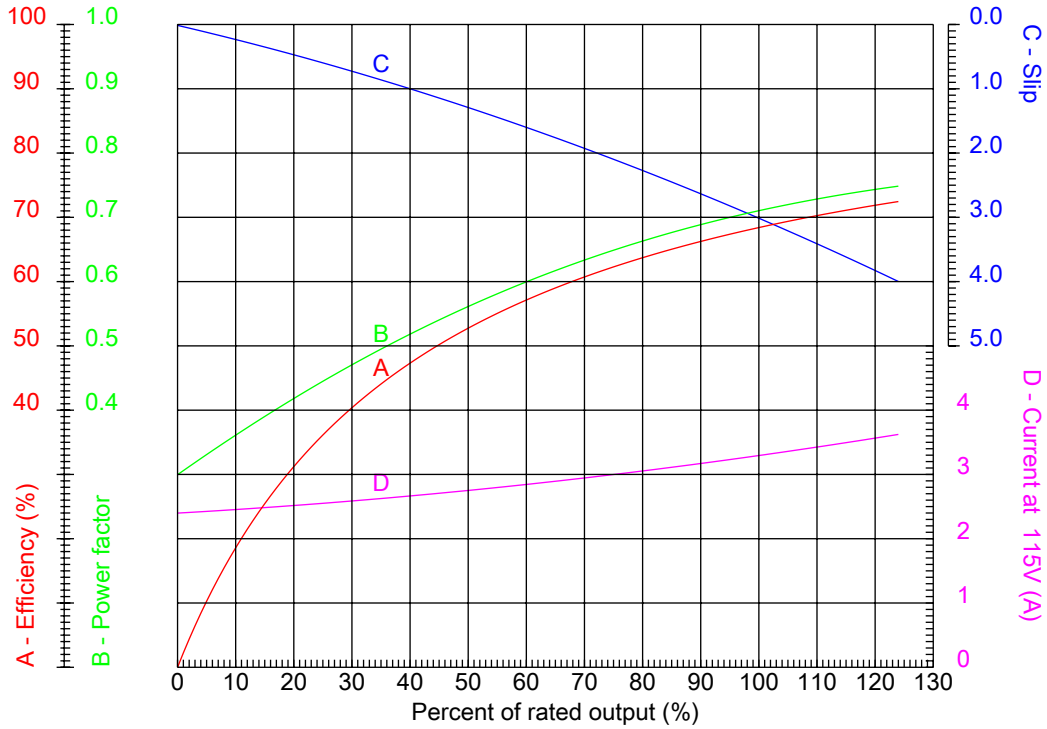

Customer :
 Product line : Single Phase: W01 (Rolled Steel) - ODP - Premium Efficiency (DOE)

Frame	: W56	Locked rotor current (I _l /I _n)	: 7.5
Output	: 0.25 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.35 (1.00 at 208V)
Full load speed	: 1745 rpm	Design	: ---
Voltage	: 115/208-230 V	Locked rotor torque	: 290 %
Rated current	: 3.20/1.77-1.60 A	Breakdown torque	: 300 %
Insulation class	: F		

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #.2518OT1BW56C-S

Performed by

Checked

1 2 3 4 5 6 7 8

A



B

C

D

E

F

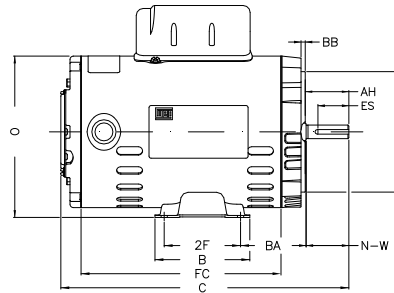

Notes: Downloaded from <http://dealerselectric.com>
Generated for Model #.2518OT1BW56C-S

P	AB	J	2E	A
5.709	5.520	1.620	4.874	6.535
H	G	HB	HK	FC
0.343	0.075	2.055	2.650	6.299
2F	B	C	BA	N-W
3.000	4.016	9.866	2.750	1.874
ES	d1	S	U	AA
1.417	A 3.15	0.187	0.625	NPT 1/2"
depth	R	LL	LM	D
0.187	0.517	3.835	3.697	3.500
XO	HD2	O	HC2	Flange
0.524	7.677	6.330	4.165	FC-149
AJ	AK	BD	BF	BB
5.874	4.500	6.470	UNC 3/8"x16-2B	0.157
AH				
2.063				

Performed by:

Checked:

Customer:

Single Phase: W01 (Rolled Steel) - ODP - Premium Efficiency (DOE)

Single-phase induction motor
Frame W56 - ODP

12-SEP-2016

