



Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

Customer :

TECHNICAL PROPOSAL

Single-phase induction motor - Squirrel cage rotor

Product line : Single Phase: W01 (Rolled Steel) - ODP - Premium Efficiency (DOE)

Catalog Number : .3318OT1BW56C-S

List Price : \$303

Notes:

Downloaded from <http://dealerselectric.com>

Generated for Model #.3318OT1BW56C-S

Performed by:

Checked:



# Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

## DATA SHEET Single-phase induction motor - Squirrel cage rotor

Customer :  
 Product line : Single Phase: W01 (Rolled Steel) - ODP - Premium Efficiency (DOE)

Frame : W56  
 Output : 0.33 HP  
 Frequency : 60 Hz  
 Poles : 4  
 Full load speed : 1745 rpm  
 Slip : 3.06 %  
 Voltage : 115/208-230 V  
 Rated current : 4.20/2.32-2.10 A  
 Locked rotor current : 33.6/16.8 A  
 Locked rotor current (I<sub>L</sub>/I<sub>n</sub>) : 8.0  
 No-load current : 3.00/1.50 A  
 Full load torque : 0.980 lb.ft  
 Locked rotor torque : 320 %  
 Breakdown torque : 320 %  
 Design : ---  
 Insulation class : F  
 Temperature rise : 80 K  
 Locked rotor time : 17 s (hot)  
 Service factor : 1.35 (1.00 at 208V)  
 Duty cycle : S1  
 Ambient temperature : -20°C - +40°C  
 Altitude : 1000 m  
 Degree of Protection : ODP  
 Approximate weight : 18 lb  
 Moment of inertia : 0.04390 sq.ft.lb  
 Noise level : 50 dB(A)

	D.E.	N.D.E.	Load	Power factor	Efficiency (%)
Bearings	6203 ZZ	6202 ZZ	100%	0.73	72.4
Regreasing interval	---	---	75%	0.67	66.0
Grease amount	---	---	50%	0.57	57.0

Notes:  
 Downloaded from <http://dealerselectric.com>  
 Generated for Model #.3318OT1BW56C-S

Performed by

Checked




# Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

## PERFORMANCE CURVES RELATED TO RATED OUTPUT

Single-phase induction motor - Squirrel cage rotor

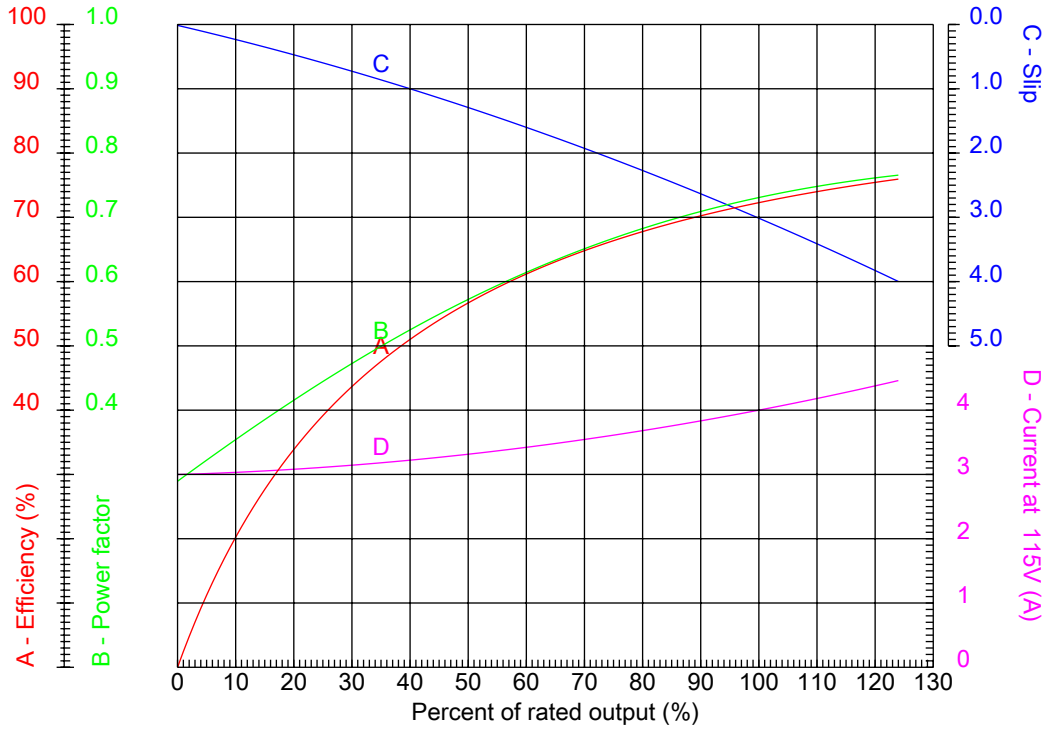


Customer :  
 Product line : Single Phase: W01 (Rolled Steel) - ODP - Premium Efficiency (DOE)

Frame	: W56	Locked rotor current (I <sub>l</sub> /I <sub>n</sub> )	: 8.0
Output	: 0.33 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.35 (1.00 at 208V)
Full load speed	: 1745 rpm	Design	: ---
Voltage	: 115/208-230 V	Locked rotor torque	: 320 %
Rated current	: 4.20/2.32-2.10 A	Breakdown torque	: 320 %
Insulation class	: F		

Notes:  
 Downloaded from <http://dealerselectric.com>  
 Generated for Model #.3318OT1BW56C-S

Performed by

Checked

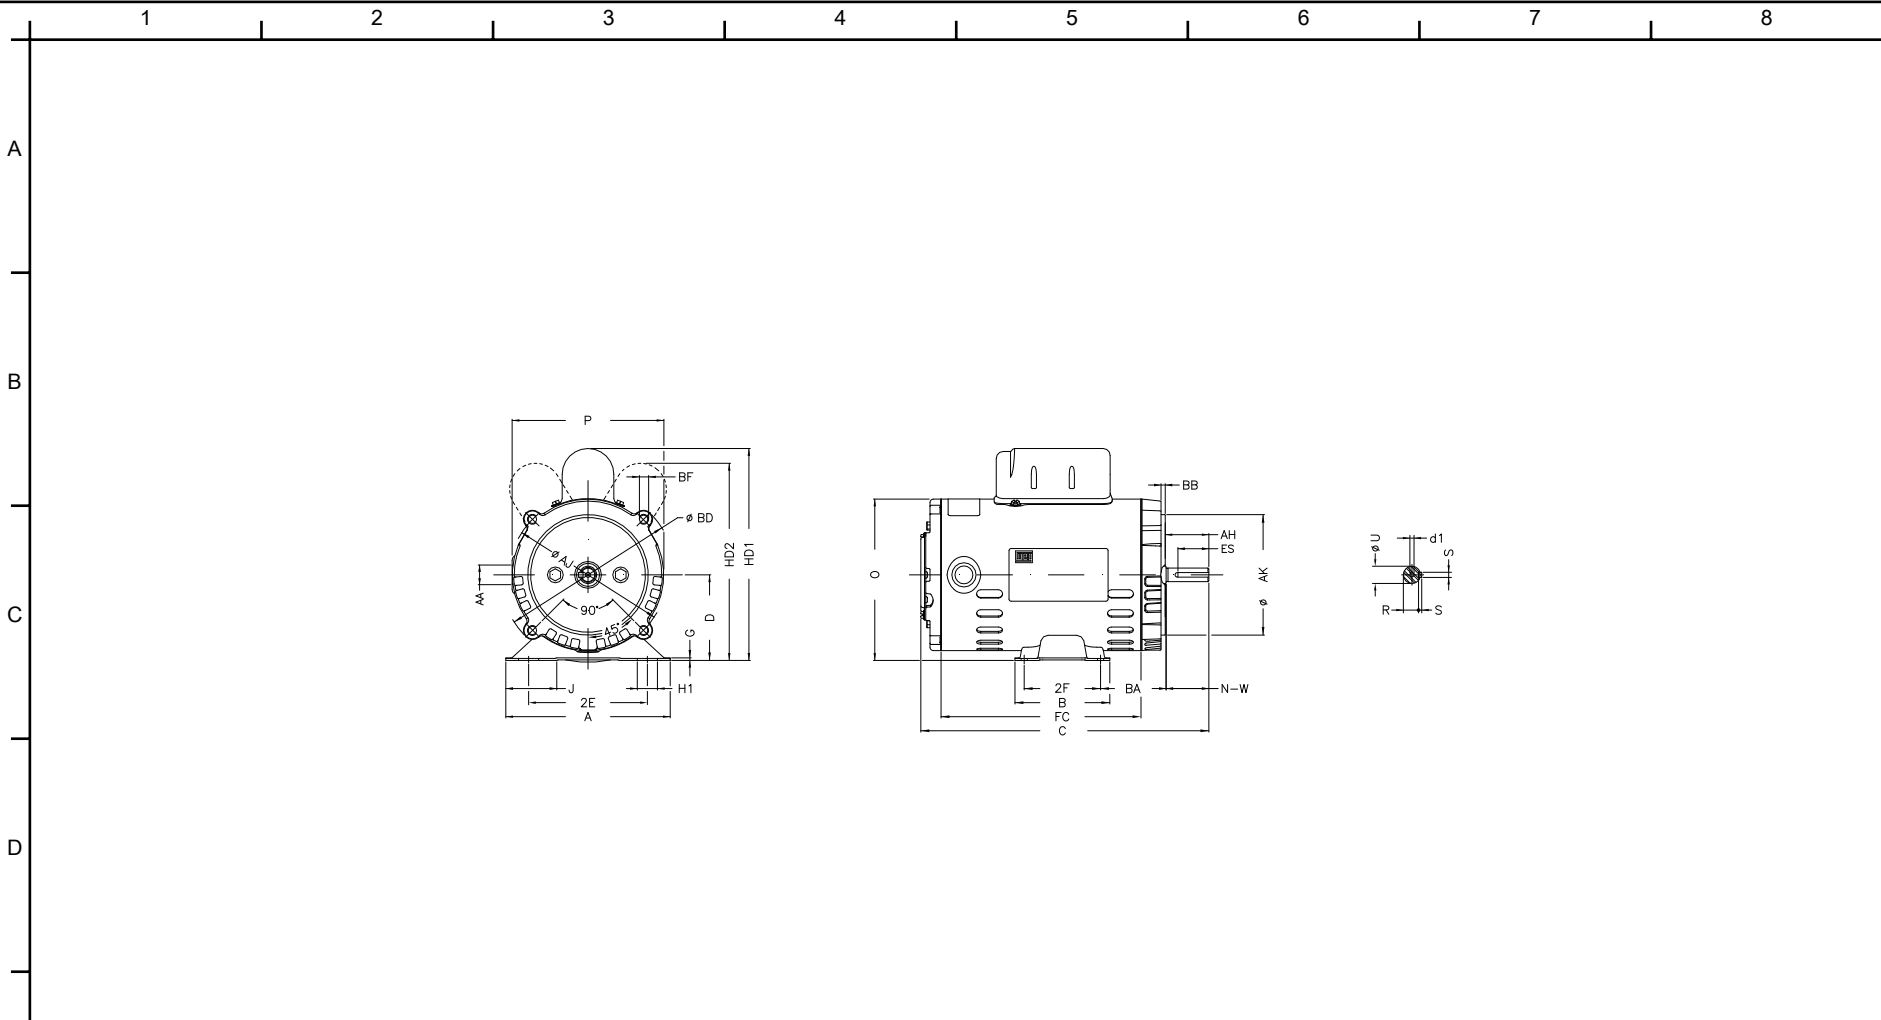

P	AB	J	2E	A
5.709	5.520	1.620	4.874	6.535
H	G	HB	HK	FC
0.343	0.075	2.055	2.650	6.693
2F	B	C	BA	N-W
3.000	4.016	10.260	2.750	1.874
ES	d1	S	U	AA
1.417	A 3.15	0.187	0.625	NPT 1/2"
depth	R	LL	LM	D
0.187	0.517	3.835	3.697	3.500
XO	HD2	O	HC2	Flange
0.524	7.677	6.330	4.165	FC-149
AJ	AK	BD	BF	BB
5.874	4.500	6.470	UNC 3/8"x16-2B	0.157
AH				
2.063				

Notes: Downloaded from <http://dealerselectric.com>  
 Generated for Model #.3318OT1BW56C-S

Performed by:

Checked:

Customer:

Single Phase: W01 (Rolled Steel) - ODP - Premium Efficiency (DOE)

Single-phase induction motor  
 Frame W56 - ODP

12-SEP-2016

