



Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

Customer :

TECHNICAL PROPOSAL

Single-phase induction motor - Squirrel cage rotor

Product line : Single Phase: W01 (Rolled Steel) - TEFC - Standard Efficiency

Catalog Number : .7536ES1B56-S

List Price : \$297

Notes:

Downloaded from <http://dealerselectric.com>

Generated for Model #.7536ES1B56-S

Performed by:

Checked:



Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

DATA SHEET Single-phase induction motor - Squirrel cage rotor

Customer :
 Product line : Single Phase: W01 (Rolled Steel) - TEFC - Standard Efficiency

Frame : 56
 Output : 0.75 HP
 Frequency : 60 Hz
 Poles : 2
 Full load speed : 3500 rpm
 Slip : 2.78 %
 Voltage : 115/208-230 V
 Rated current : 8.00/4.42-4.00 A
 Locked rotor current : 64.0/32.0 A
 Locked rotor current (I_L/I_n) : 8.0
 No-load current : 4.00/2.00 A
 Full load torque : 1.11 lb.ft
 Locked rotor torque : 280 %
 Breakdown torque : 290 %
 Design : ---
 Insulation class : F
 Temperature rise : 80 K
 Locked rotor time : 10 s (hot)
 Service factor : 1.15
 Duty cycle : S1
 Ambient temperature : -20°C - +40°C
 Altitude : 1000 m
 Degree of Protection : IP55
 Approximate weight : 26 lb
 Moment of inertia : 0.03939 sq.ft.lb
 Noise level : 68 dB(A)

| | D.E. | N.D.E. |
|---------------------|---------|---------|
| Bearings | 6203 ZZ | 6202 ZZ |
| Regreasing interval | --- | --- |
| Grease amount | --- | --- |

| Load | Power factor | Efficiency (%) |
|------|--------------|----------------|
| 100% | 0.91 | 66.0 |
| 75% | 0.87 | 62.0 |
| 50% | 0.81 | 52.0 |

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #.7536ES1B56-S

Performed by

Checked




Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Single-phase induction motor - Squirrel cage rotor

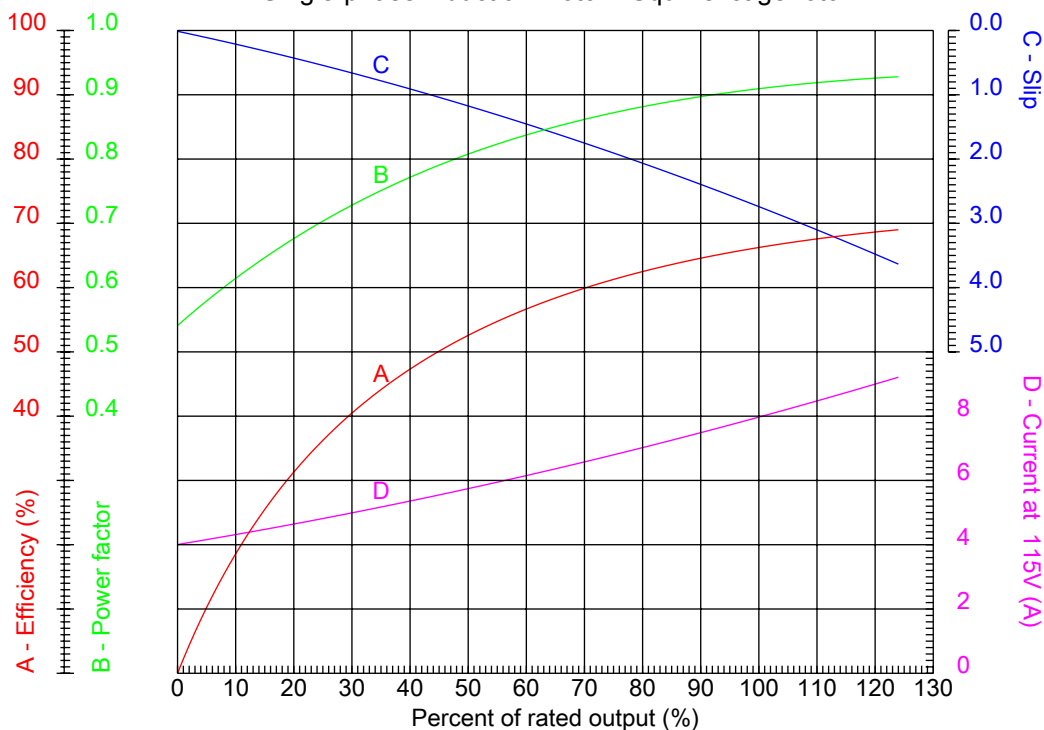

Customer :
 Product line : Single Phase: W01 (Rolled Steel) - TEFC - Standard Efficiency

| | |
|----------------------------------|--|
| Frame : 56 | Locked rotor current (I _l /I _n) : 8.0 |
| Output : 0.75 HP | Duty cycle : S1 |
| Frequency : 60 Hz | Service factor : 1.15 |
| Full load speed : 3500 rpm | Design : --- |
| Voltage : 115/208-230 V | Locked rotor torque : 280 % |
| Rated current : 8.00/4.42-4.00 A | Breakdown torque : 290 % |
| Insulation class : F | |

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #.7536ES1B56-S

Performed by

Checked

1 2 3 4 5 6 7 8

A


B

C

D

E

F

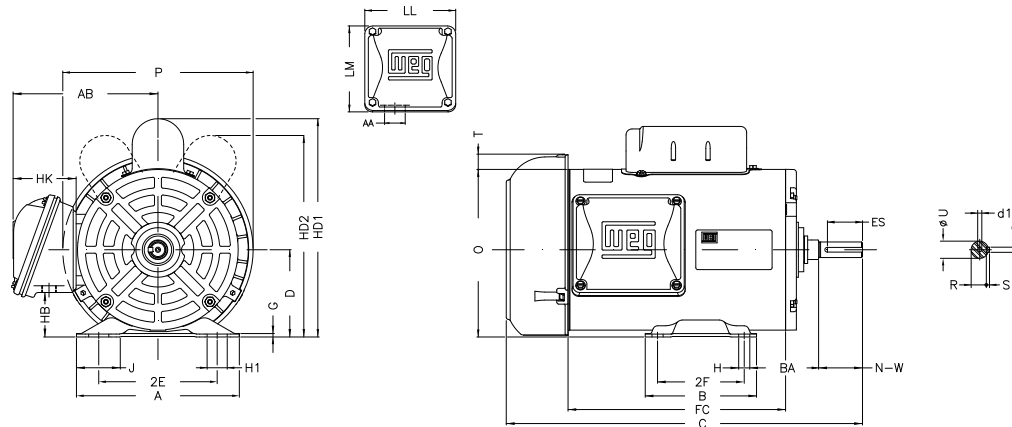

Notes: Downloaded from <http://dealerselectric.com>
Generated for Model #.7536ES1B56-S

| | | | | |
|-------|--------|-------|--------|--------|
| P | AB | J | 2E | A |
| 7.638 | 5.882 | 1.732 | 4.874 | 6.535 |
| H | G | HB | HK | XO |
| 0.343 | 0.120 | 1.783 | 2.638 | 0.603 |
| O | FC | 2F | B | C |
| 6.724 | 7.086 | 3.000 | 4.016 | 12.721 |
| BA | N-W | ES | d1 | S |
| 2.750 | 1.874 | 1.417 | A 3.15 | 0.187 |
| U | AA | depth | R | LL |
| 0.625 | 0.881" | 0.187 | 0.517 | 4.543 |
| LM | BB | D | CH | HD2 |
| 4.106 | 0.603 | 3.500 | 1.377 | 8.150 |
| HC2 | | | | |
| 4.650 | | | | |

Performed by:

Checked:

Customer:

Single Phase: W01 (Rolled Steel) - TEFC - Standard Efficiency

Single-phase induction motor
Frame 56 - IP55

12-SEP-2016

