



Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

Customer :

TECHNICAL PROPOSAL

Three-phase induction motor - Squirrel cage rotor

Product line : Three-Phase : NEMA 56 Frames - ODP

Catalog Number : .7536OS3EB56CFL

List Price : \$283

Notes:

Downloaded from <http://dealerselectric.com>

Generated for Model #.7536OS3EB56CFL

Performed by:

Checked:



Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

DATA SHEET Three-phase induction motor - Squirrel cage rotor

Customer :
Product line : Three-Phase : NEMA 56 Frames - ODP

Frame : B56
Output : 0.75 HP
Frequency : 60 Hz
Poles : 2
Full load speed : 3450 rpm
Slip : 4.17 %
Voltage : 208-230/460 V
Rated current : 2.45-2.39/1.20 A
Locked rotor current : 13.6/6.82 A
Locked rotor current (I_L/I_n) : 5.7
No-load current : 1.53/0.765 A
Full load torque : 1.13 lb.ft
Locked rotor torque : 240 %
Breakdown torque : 250 %
Design : A
Insulation class : B
Temperature rise : 80 K
Locked rotor time : 15 s (hot)
Service factor : 1.25 (1.00 at 208V)
Duty cycle : S1
Ambient temperature : -20°C - +40°C
Altitude : 1000 m
Degree of Protection : IP21
Approximate weight : 22 lb
Moment of inertia : 0.02207 sq.ft.lb
Noise level : ---

	D.E.	N.D.E.
Bearings	6204 ZZ	6203 ZZ
Regreasing interval	---	---
Grease amount	---	---

Load	Power factor	Efficiency (%)
100%	0.81	72.0
75%	0.73	70.0
50%	0.61	64.0

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #.7536OS3EB56CFL

Performed by

Checked




Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

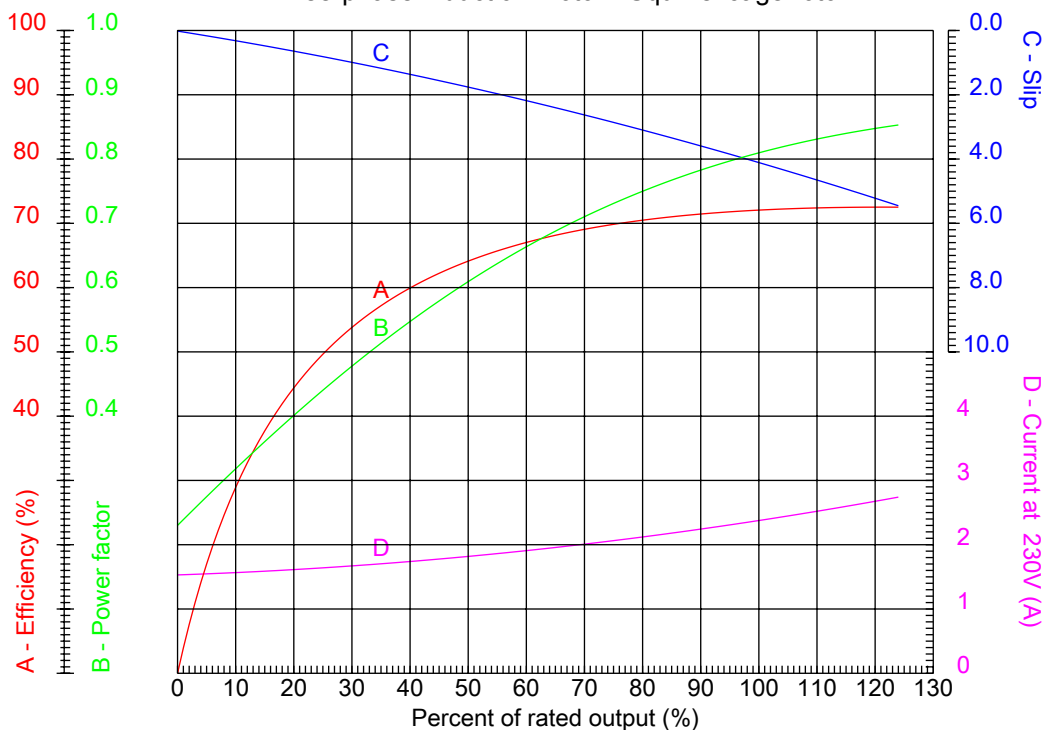

Customer :
 Product line : Three-Phase : NEMA 56 Frames - ODP

Frame : B56	Locked rotor current (I _L /I _n) : 5.7
Output : 0.75 HP	Duty cycle : S1
Frequency : 60 Hz	Service factor : 1.25 (1.00 at 208V)
Full load speed : 3450 rpm	Design : A
Voltage : 208-230/460 V	Locked rotor torque : 240 %
Rated current : 2.45-2.39/1.20 A	Breakdown torque : 250 %
Insulation class : B	

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #.7536OS3EB56CFL

Performed by

Checked




Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

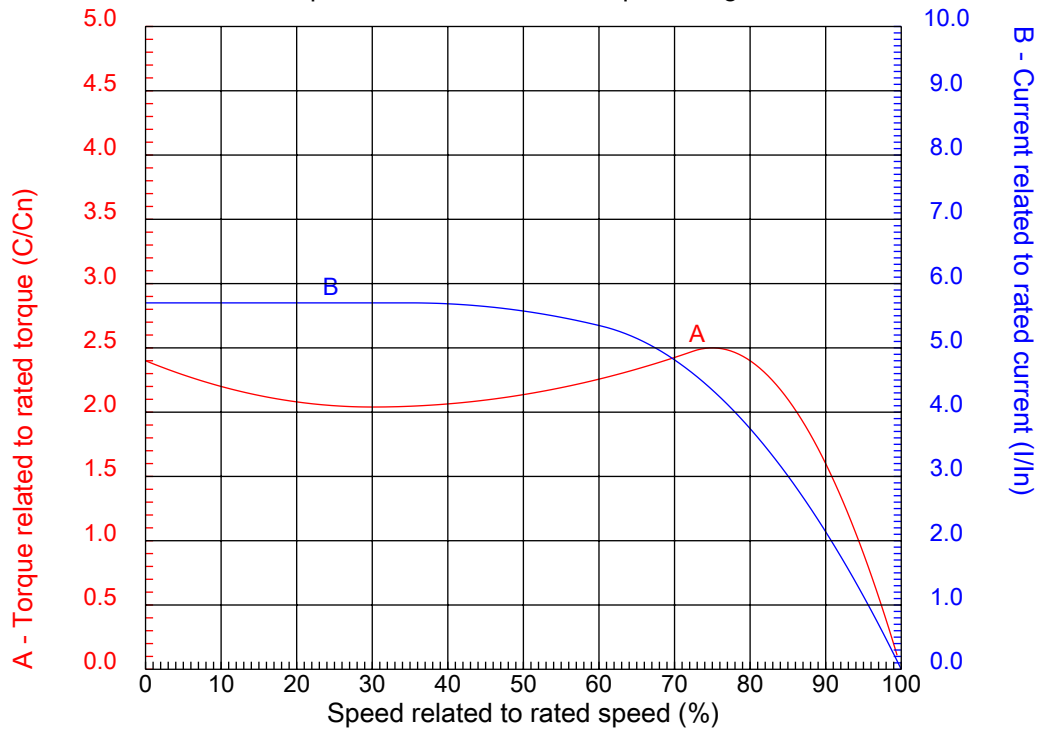


Customer :
Product line : Three-Phase : NEMA 56 Frames - ODP

Frame	: B56	Locked rotor current (I _l /I _h)	: 5.7
Output	: 0.75 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.25 (1.00 at 208V)
Full load speed	: 3450 rpm	Design	: A
Voltage	: 208-230/460 V	Locked rotor torque	: 240 %
Rated current	: 2.45-2.39/1.20 A	Breakdown torque	: 250 %
Insulation class	: B		

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #.7536OS3EB56CFL

Performed by

Checked

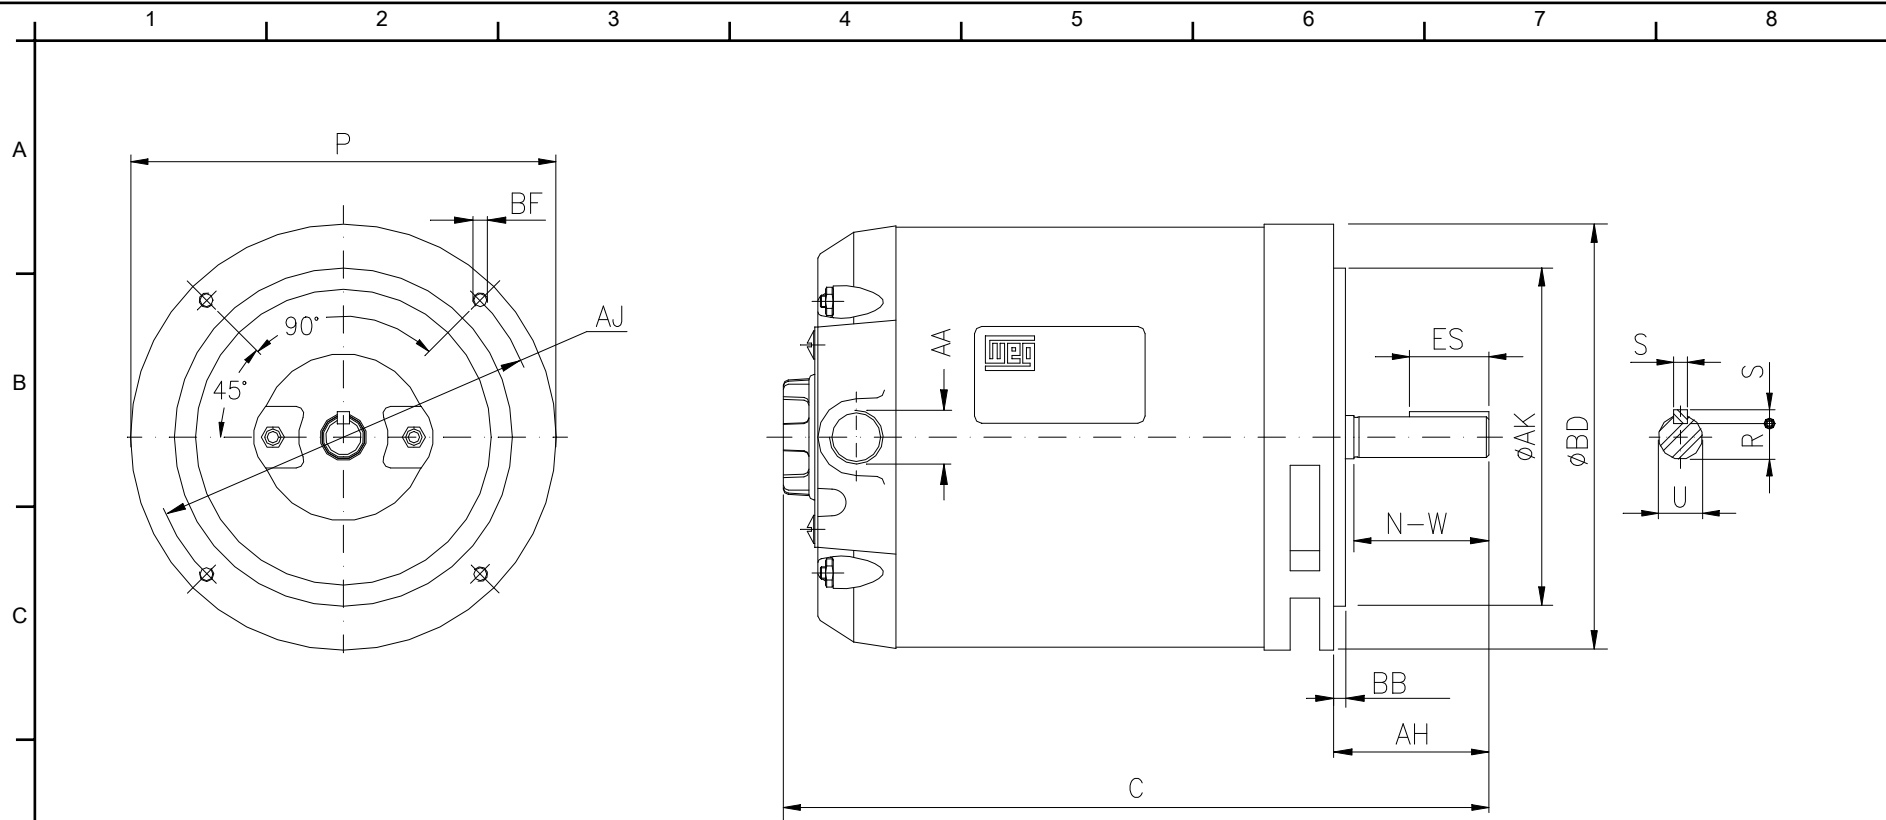

Notes: Downloaded from <http://dealerselectric.com>
 Generated for Model #.7536OS3EB56CFL

Performed by:

Checked:

Customer:

Three-Phase : NEMA 56 Frames - ODP

P	ES	S	N-W	depth
6.457	1.102	0.187	1.874	0.187
U	R	d1	C	AA
0.6250	0.517	A 3,15	11.102	NPT 1/2"
Flange	AJ	AK	BD	BF
FC-149	5.874	4.500	6.500	UNC 3/8"x16-2B
BB				
0.157				

Three-phase induction motor
 Frame B56 - IP21

12-SEP-2016



1 2 3 4 5 6 7 8

A


LOW VOLTAGE

HIGH VOLTAGE

B



C



D

E

F

Notes: Downloaded from <http://dealerselectric.com>
 Generated for Model #.7536OS3EB56CFL

Performed by:

Checked:

Customer:

Three-Phase : NEMA 56 Frames - ODP

Three-phase induction motor
 Frame B56 - IP21

12-SEP-2016

