



## Dealers Industrial Equipment

No.:

Date: 13-SEP-2016

Customer :

### TECHNICAL PROPOSAL

## Three-phase induction motor - Squirrel cage rotor

Product line : Three-Phase : Explosion Proof - High Efficiency

Catalog Number : 01018XP3ER215TC

List Price : \$1,618

#### Notes:

Downloaded from <http://dealerselectric.com>

Generated for Model #01018XP3ER215TC

Performed by:

Checked:



## Dealers Industrial Equipment

No.:

Date: 13-SEP-2016

### DATA SHEET

#### Three-phase induction motor - Squirrel cage rotor

Customer :  
Product line : Three-Phase : Explosion Proof - High Efficiency

Frame : 215T  
Output : 10 HP  
Frequency : 60 Hz  
Poles : 4  
Full load speed : 1760 rpm  
Slip : 2.22 %  
Voltage : 208-230/460 V  
Rated current : 28.3-25.6/12.8 A  
Locked rotor current : 161/80.6 A  
Locked rotor current (I<sub>L</sub>/I<sub>N</sub>) : 6.3  
No-load current : 10.5/5.25 A  
Full load torque : 29.4 lb.ft  
Locked rotor torque : 200 %  
Breakdown torque : 250 %  
Design : B  
Insulation class : F  
Temperature rise : 80 K  
Locked rotor time : 15 s (hot)  
Service factor : 1.15  
Duty cycle : S1  
Ambient temperature : -20°C - +40°C  
Altitude : 1000 m  
Degree of Protection : IP54  
Approximate weight : 207 lb  
Moment of inertia : 1.3799 sq.ft.lb  
Noise level : 58 dB(A)

	D.E.	N.D.E.
Bearings	6308 2RS	6207 2RS
Regreasing interval	---	---
Grease amount	---	---

Load	Power factor	Efficiency (%)
100%	0.82	89.5
75%	0.77	90.2
50%	0.65	89.5

#### Notes:

Downloaded from <http://dealerselectric.com>  
Generated for Model #01018XP3ER215TC

Performed by

Checked




## Dealers Industrial Equipment

No.:

Date: 13-SEP-2016

### PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

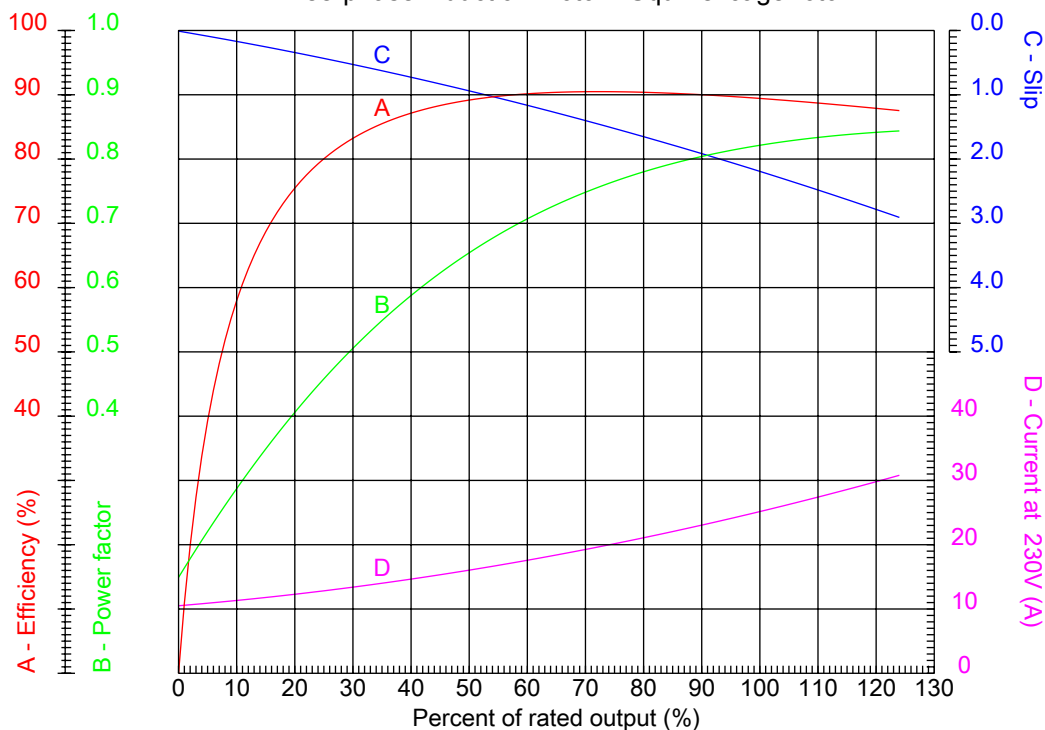

Customer :  
Product line : Three-Phase : Explosion Proof - High Efficiency

Frame	: 215T	Locked rotor current (I <sub>L</sub> /I <sub>n</sub> )	: 6.3
Output	: 10 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.15
Full load speed	: 1760 rpm	Design	: B
Voltage	: 208-230/460 V	Locked rotor torque	: 200 %
Rated current	: 28.3-25.6/12.8 A	Breakdown torque	: 250 %
Insulation class	: F		

Notes:  
Downloaded from <http://dealerselectric.com>  
Generated for Model #01018XP3ER215TC

Performed by

Checked




## Dealers Industrial Equipment

No.:

Date: 13-SEP-2016

### CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

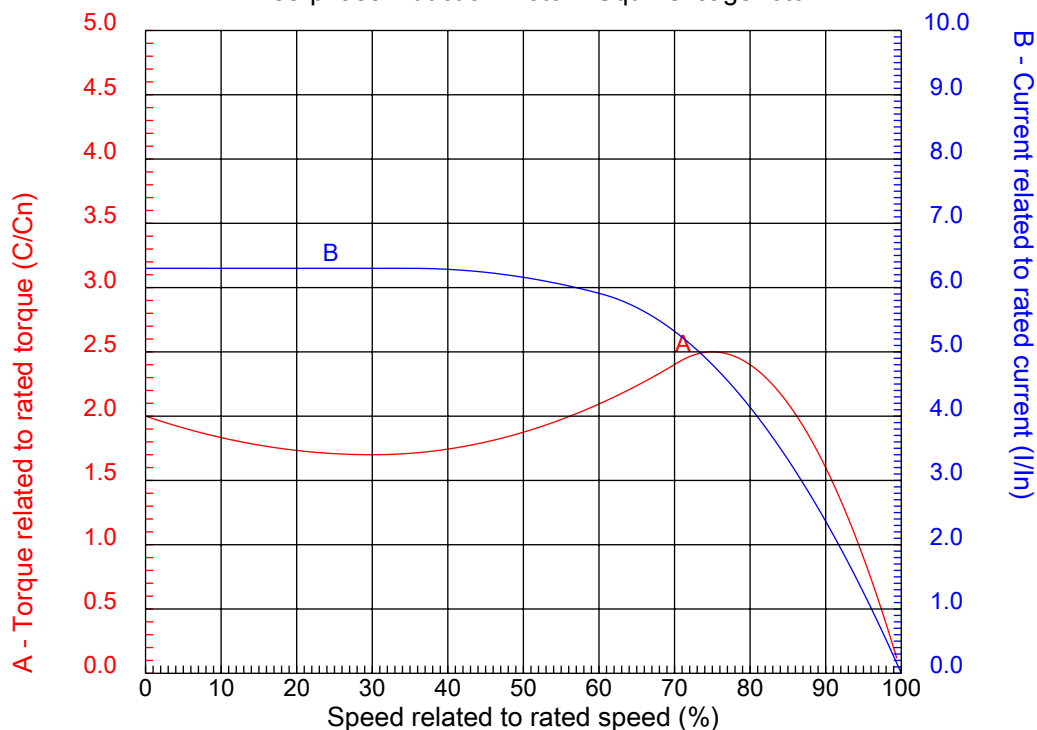


Customer :  
Product line : Three-Phase : Explosion Proof - High Efficiency

Frame	: 215T	Locked rotor current (I <sub>L</sub> /I <sub>n</sub> )	: 6.3
Output	: 10 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.15
Full load speed	: 1760 rpm	Design	: B
Voltage	: 208-230/460 V	Locked rotor torque	: 200 %
Rated current	: 28.3-25.6/12.8 A	Breakdown torque	: 250 %
Insulation class	: F		

Notes:  
Downloaded from <http://dealerselectric.com>  
Generated for Model #01018XP3ER215TC

Performed by

Checked

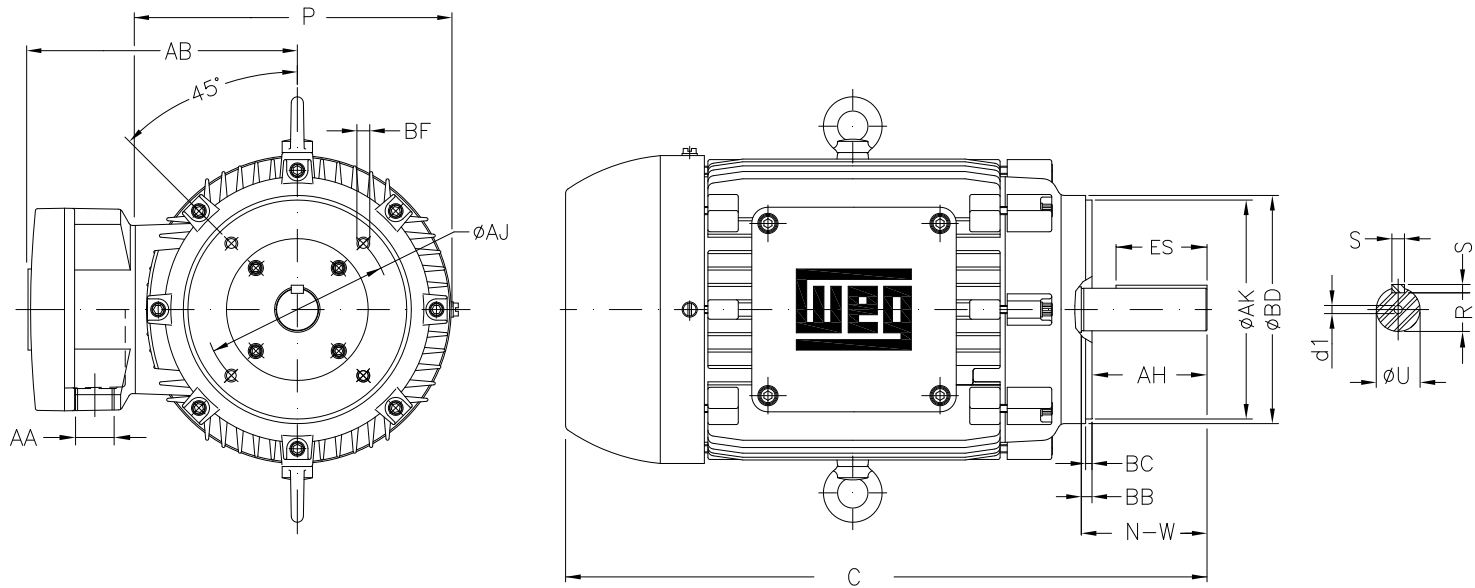

Notes: Downloaded from <http://dealerselectric.com>  
Generated for Model #01018XP3ER215TC

Performed by:

Checked:

Customer:

Three-Phase : Explosion Proof - High Efficiency

Three-phase induction motor  
Frame 215T - IP54

13-SEP-2016



P	ES	S	depth	N-W
10.709	2.480	0.313	0.313	3.375
U	R	AB	C	AA
1.375	1.203	9.252	19.450	NPT 1"
d1	d2	Flange	AJ	AK
A 4	A 4	FC-184	7.250	8.500
BD	BF	BB	BC	AH
8.875	UNC 1/2"x13	0.250	0.250	3.125

1 2 3 4 5 6 7 8

## LOW VOLTAGE

## HIGH VOLTAGE

A



B

C

D

E

F

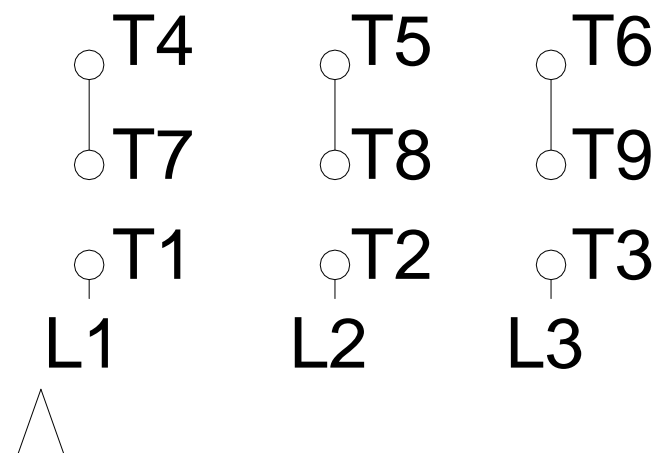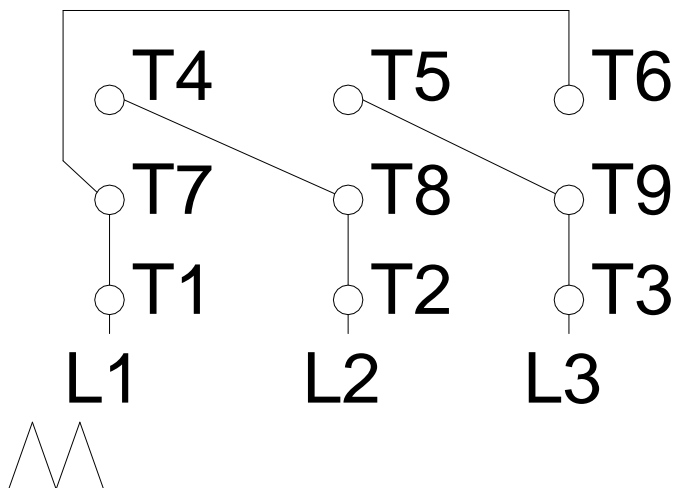

Notes: Downloaded from <http://dealerselectric.com>  
Generated for Model #01018XP3ER215TC

Performed by:

Checked:

Customer:

Three-Phase : Explosion Proof - High Efficiency

Three-phase induction motor  
Frame 215T - IP54

13-SEP-2016

