



Dealers Industrial Equipment

No.:

Date: 23-SEP-2016

Customer :

TECHNICAL PROPOSAL

Three-phase induction motor - Squirrel cage rotor

Product line : Close Coupled Pump: Three-Phase - W01 (Rolled Steel) "JP" Type - ODP -
NEMA Premium Efficiency
Catalog Number : 02036OT3E254JP-S
List Price : \$2,106

Notes:

Downloaded from <http://dealerselectric.com>
Generated for Model #02036OT3E254JP-S

Performed by:

Checked:



Dealers Industrial Equipment

No.:

Date: 23-SEP-2016

DATA SHEET Three-phase induction motor - Squirrel cage rotor

Customer :
 Product line : Close Coupled Pump: Three-Phase - W01 (Rolled Steel) "JP" Type - ODP - NEMA Premium Efficiency

Frame : 254/6JP
 Output : 20 HP
 Frequency : 60 Hz
 Poles : 2
 Full load speed : 3525 rpm
 Slip : 2.08 %
 Voltage : 208-230/460 V
 Rated current : 52.6-47.6/23.8 A
 Locked rotor current : 286/143 A
 Locked rotor current (I_L/I_n) : 6.0
 No-load current : 17.0/8.50 A
 Full load torque : 29.4 lb.ft
 Locked rotor torque : 180 %
 Breakdown torque : 240 %
 Design : B
 Insulation class : F
 Temperature rise : 80 K
 Locked rotor time : 13 s (hot)
 Service factor : 1.15
 Duty cycle : S1
 Ambient temperature : -20°C - +40°C
 Altitude : 1000 m
 Degree of Protection : ODP
 Approximate weight : 151 lb
 Moment of inertia : 0.78475 sq.ft.lb
 Noise level : 70 dB(A)

| | D.E. | N.D.E. | Load | Power factor | Efficiency (%) |
|---------------------|-----------|-----------|------|--------------|----------------|
| Bearings | 6309 Z-C3 | 6208 Z-C3 | 100% | 0.87 | 91.0 |
| Regreasing interval | 20000 h | 20000 h | 75% | 0.83 | 91.0 |
| Grease amount | 13 g | 8 g | 50% | 0.76 | 90.2 |

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #02036OT3E254JP-S

Performed by

Checked




Dealers Industrial Equipment

No.:

Date: 23-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

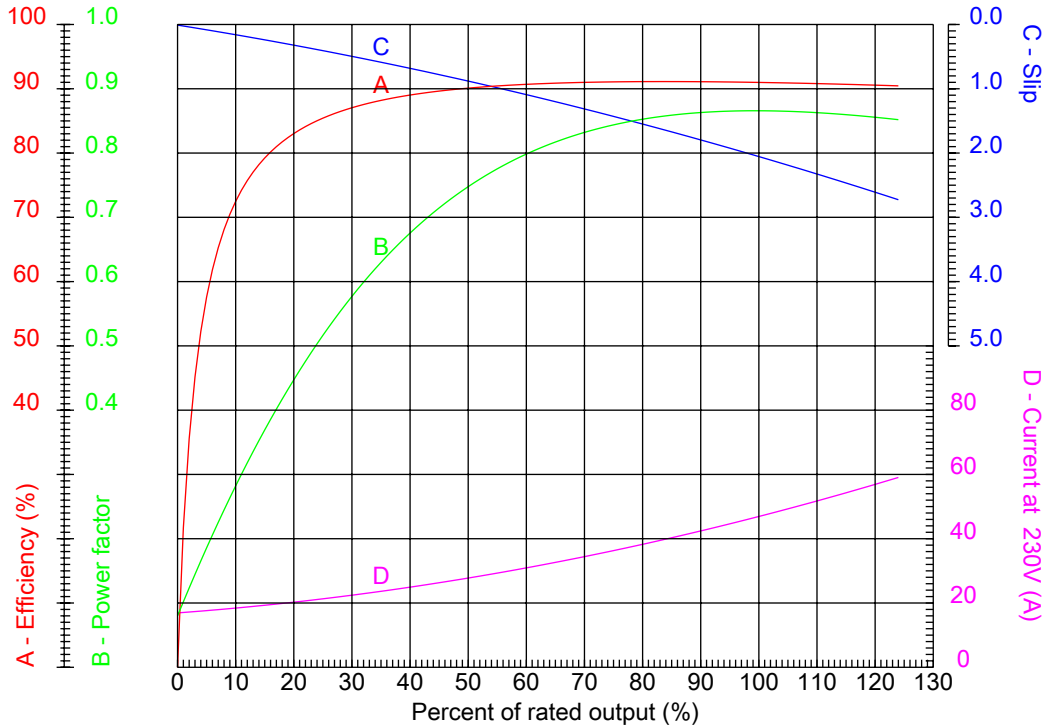

Customer :
 Product line : Close Coupled Pump: Three-Phase - W01 (Rolled Steel) "JP" Type - ODP - NEMA Premium Efficiency

| | | | |
|------------------|--------------------|--|---------|
| Frame | : 254/6JP | Locked rotor current (I _l /I _n) | : 6.0 |
| Output | : 20 HP | Duty cycle | : S1 |
| Frequency | : 60 Hz | Service factor | : 1.15 |
| Full load speed | : 3525 rpm | Design | : B |
| Voltage | : 208-230/460 V | Locked rotor torque | : 180 % |
| Rated current | : 52.6-47.6/23.8 A | Breakdown torque | : 240 % |
| Insulation class | : F | | |

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #02036OT3E254JP-S

Performed by

Checked




Dealers Industrial Equipment

No.:

Date: 23-SEP-2016

CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

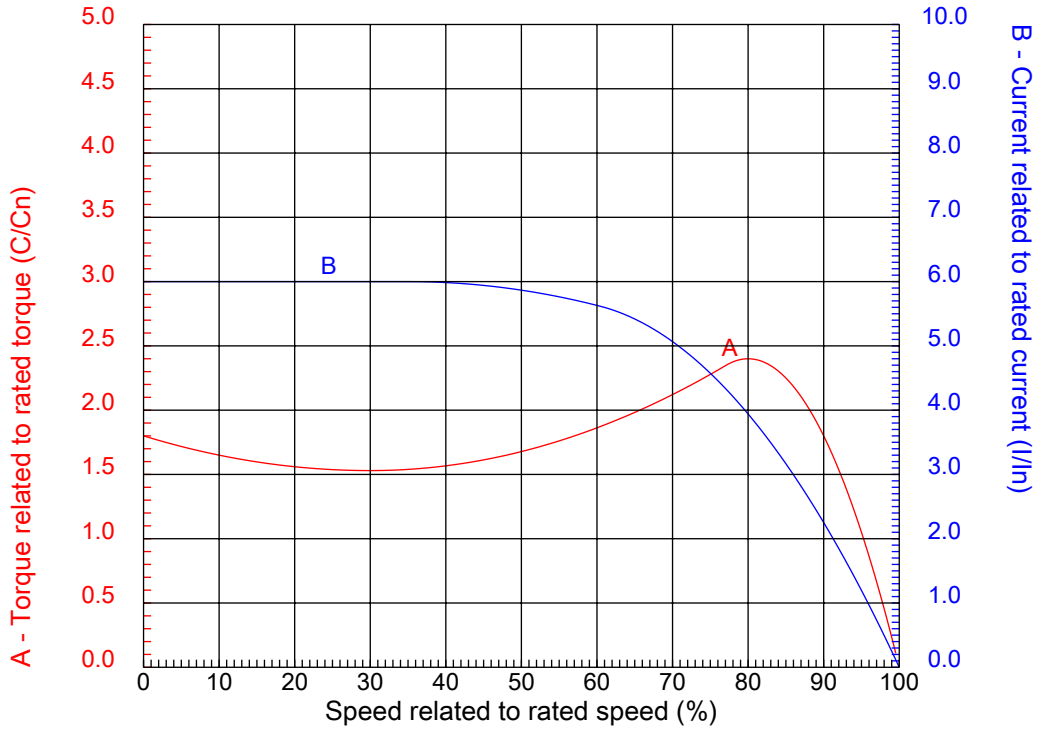

| | | |
|--------------|---|--|
| Customer | : | |
| Product line | : | Close Coupled Pump: Three-Phase - W01 (Rolled Steel) "JP" Type - ODP - NEMA Premium Efficiency |

| | | | | | |
|------------------|---|------------------|--|---|-------|
| Frame | : | 254/6JP | Locked rotor current (I _l /I _n) | : | 6.0 |
| Output | : | 20 HP | Duty cycle | : | S1 |
| Frequency | : | 60 Hz | Service factor | : | 1.15 |
| Full load speed | : | 3525 rpm | Design | : | B |
| Voltage | : | 208-230/460 V | Locked rotor torque | : | 180 % |
| Rated current | : | 52.6-47.6/23.8 A | Breakdown torque | : | 240 % |
| Insulation class | : | F | | | |

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #02036OT3E254JP-S

Performed by

Checked

1 2 3 4 5 6 7 8

A

B

C

D

E

F



Notes: Downloaded from <http://dealerselectric.com>
Generated for Model #02036OT3E254JP-S

| | | | | |
|--------------------|-------------------|------------------|--------------|-------------|
| 2E 10.000 | J 1.693 | A 11.417 | P 11.558 | AB 9.448 |
| 2F 8.252/10.000 | B 11.417 | BA 4.750 | D 6.250 | G 0.187 |
| O 12.010 | T 0.019 | H 0.530 | AA 1.732" | ER 8.130 |
| EQ 2.382 | ET 5.886 | U 1.249 | EM 1.375 | EL 1.750 |
| EP 1.769 | ES 2.559 | t1 1.024 | t2 1.496 | C 24.843 |
| CH 1.929 | FC 12.992 | Flange FC-184 | AJ 7.250 | AK 8.500 |
| BD 11.084 | BF UNC 1/2"x13 | BB 0.250 | AH 8.130 | |

Performed by:


Checked:

Customer:

Close Coupled Pump: Three-Phase - W01 (Rolled Steel) "JP" Type - ODP -

Three-phase induction motor
Frame 254/6JP - ODP

23-SEP-2016



1 2 3 4 5 6 7 8

A

LOW VOLTAGE

HIGH VOLTAGE





B

CONNECTIONS FOR STARTING ONLY:

LOW VOLTAGE

HIGH VOLTAGE



C

D

E

F

Notes: Downloaded from <http://dealerselectric.com>
Generated for Model #02036OT3E254JP-S

Performed by:

Checked:

Customer:

Close Coupled Pump: Three-Phase - W01 (Rolled Steel) "JP" Type - ODP -

Three-phase induction motor
Frame 254/6JP - IP21

23-SEP-2016

