



Dealers Industrial Equipment

No.:

Date: 28-SEP-2016

Customer :

TECHNICAL PROPOSAL

Three-phase induction motor - Squirrel cage rotor

Product line : Three-Phase: W22 IE2 IEC Tru-Metric - TEFC (IP55) Cast Iron Frame

Catalog Number : 13209EP3Y315L-W22

List Price : \$30,078

Notes:

Downloaded from <http://dealerselectric.com>

Generated for Model #13209EP3Y315L-W22

Performed by:

Checked:



Dealers Industrial Equipment

No.:

Date: 28-SEP-2016

### DATA SHEET Three-phase induction motor - Squirrel cage rotor

Customer :  
Product line : Three-Phase: W22 IE2 IEC Tru-Metric - TEFC (IP55) Cast Iron Frame

Frame : 315L  
Output : 175 HP  
Frequency : 60 Hz  
Poles : 8  
Full load speed : 890 rpm  
Slip : 1.11 %  
Voltage : 460 V  
Rated current : 217 A  
Locked rotor current : 1540 A  
Locked rotor current (I<sub>L</sub>/I<sub>n</sub>) : 7.1  
No-load current : 107 A  
Full load torque : 1019 lb.ft  
Locked rotor torque : 230 %  
Breakdown torque : 250 %  
Design : ---  
Insulation class : F  
Temperature rise : 80 K  
Locked rotor time : 20 s (hot)  
Service factor : 1.15  
Duty cycle : S1  
Ambient temperature : -20°C - +40°C  
Altitude : 1000 m  
Degree of Protection : IP55  
Approximate weight : 2981 lb  
Moment of inertia : 312.96 sq.ft.lb  
Noise level : 71 dB(A)

	D.E.	N.D.E.
Bearings	6319 C3	6316 C3
Regreasing interval	17000 h	20000 h
Grease amount	45 g	34 g

Load	Power factor	Efficiency (%)
100%	0.80	95.4
75%	0.74	95.0
50%	0.61	94.5

Notes:  
Downloaded from <http://dealerselectric.com>  
Generated for Model #13209EP3Y315L-W22

Performed by

Checked




# Dealers Industrial Equipment

No.:

Date: 28-SEP-2016

## PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

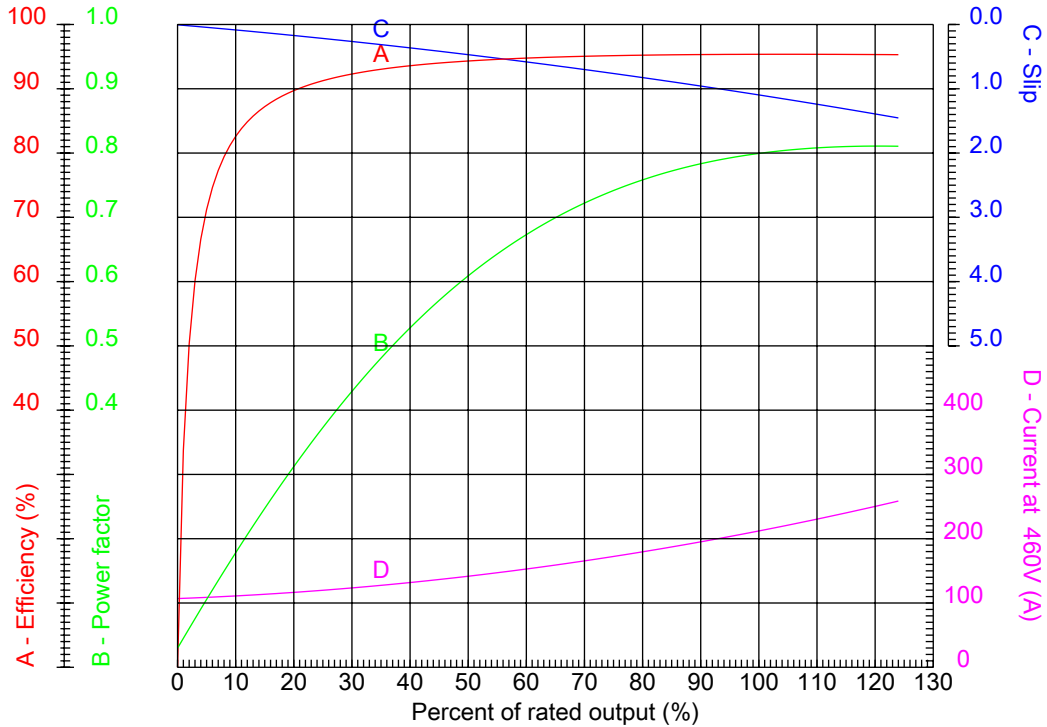

Customer :  
 Product line : Three-Phase: W22 IE2 IEC Tru-Metric - TEFC (IP55) Cast Iron Frame

Frame	: 315L	Locked rotor current (I <sub>l</sub> /I <sub>n</sub> )	: 7.1
Output	: 175 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.15
Full load speed	: 890 rpm	Design	: ---
Voltage	: 460 V	Locked rotor torque	: 230 %
Rated current	: 217 A	Breakdown torque	: 250 %
Insulation class	: F		

Notes:  
 Downloaded from <http://dealerselectric.com>  
 Generated for Model #13209EP3Y315L-W22


Performed by

Checked



## CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

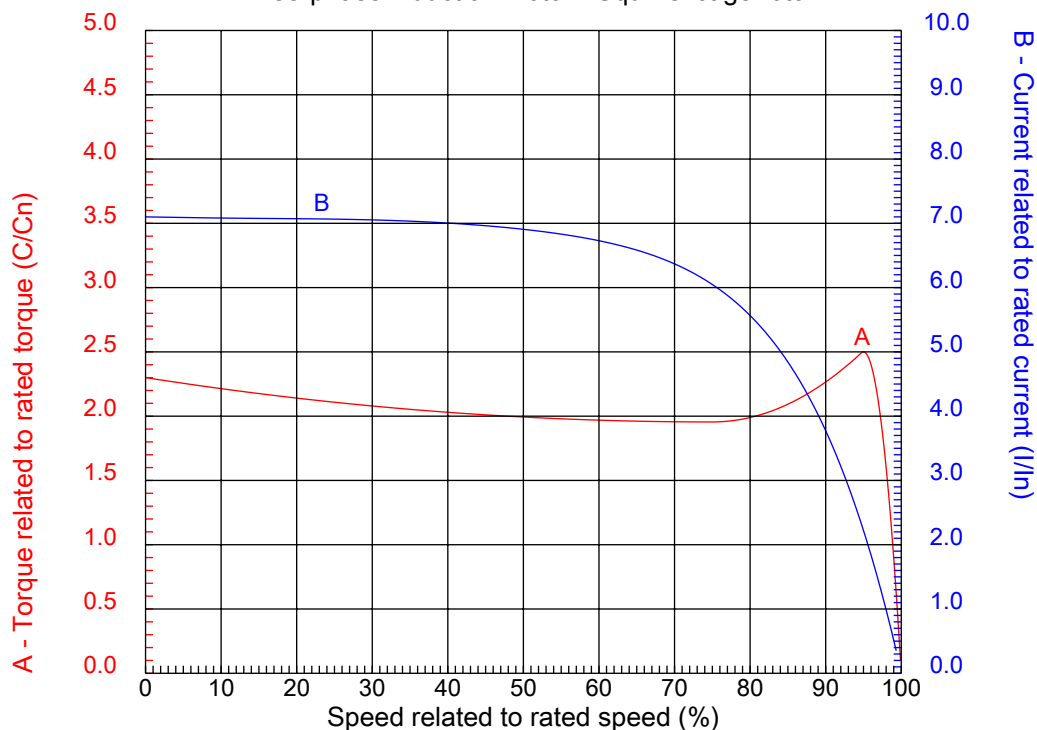

Customer :  
Product line : Three-Phase: W22 IE2 IEC Tru-Metric - TEFC (IP55) Cast Iron Frame

Frame	: 315L	Locked rotor current (I <sub>l</sub> /I <sub>n</sub> )	: 7.1
Output	: 175 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.15
Full load speed	: 890 rpm	Design	: ---
Voltage	: 460 V	Locked rotor torque	: 230 %
Rated current	: 217 A	Breakdown torque	: 250 %
Insulation class	: F		


Notes:  
Downloaded from <http://dealerselectric.com>  
Generated for Model #13209EP3Y315L-W22

Performed by

Checked

1 2 3 4 5 6 7 8

A  
B  
C  
D  
E  
F

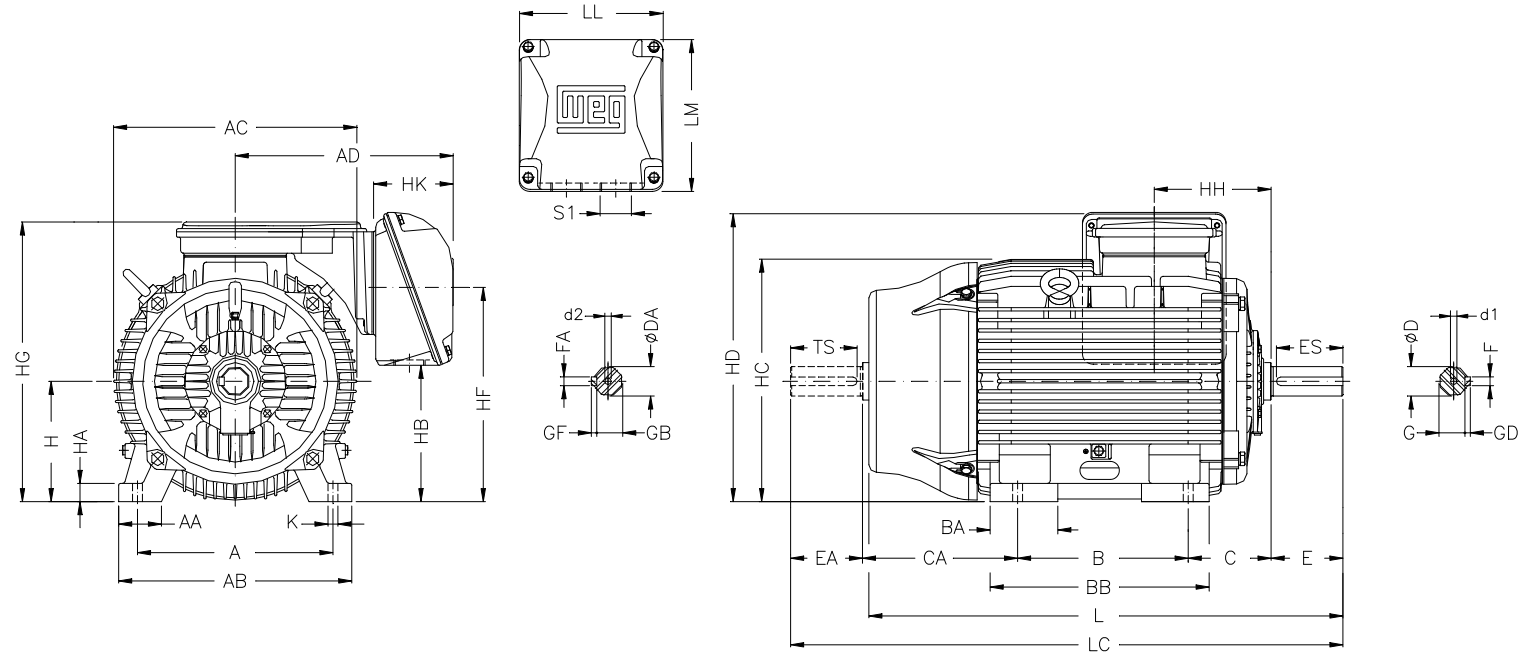

A	AA	AB	AC	AD
508	120	630	657	589
B	BA	BB	C	CA
508	219	752	216	502
D	E	ES	F	G
80m6	170	160	22	71
GD	DA	EA	TS	FA
14	65m6	140	125	18
GB	GF	H	HA	HB
58	11	315	48	336
HC	HD	HF	HG	HH
644	774	575	760	284
HK	K	L	LC	LL
220	28	1389	1536	404
LM	S1	d1	d2	
436	2xM63x1.5	DM20	DM20	

Notes: Downloaded from <http://dealerselectric.com>  
Generated for Model #13209EP3Y315L-W22

Performed by:

Checked:

Customer:

Three-Phase: W22 IE2 IEC Tru-Metric - TEFC (IP55) Cast Iron Frame

Three-phase induction motor  
Frame 315L - IP55

28-SEP-2016

