




CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

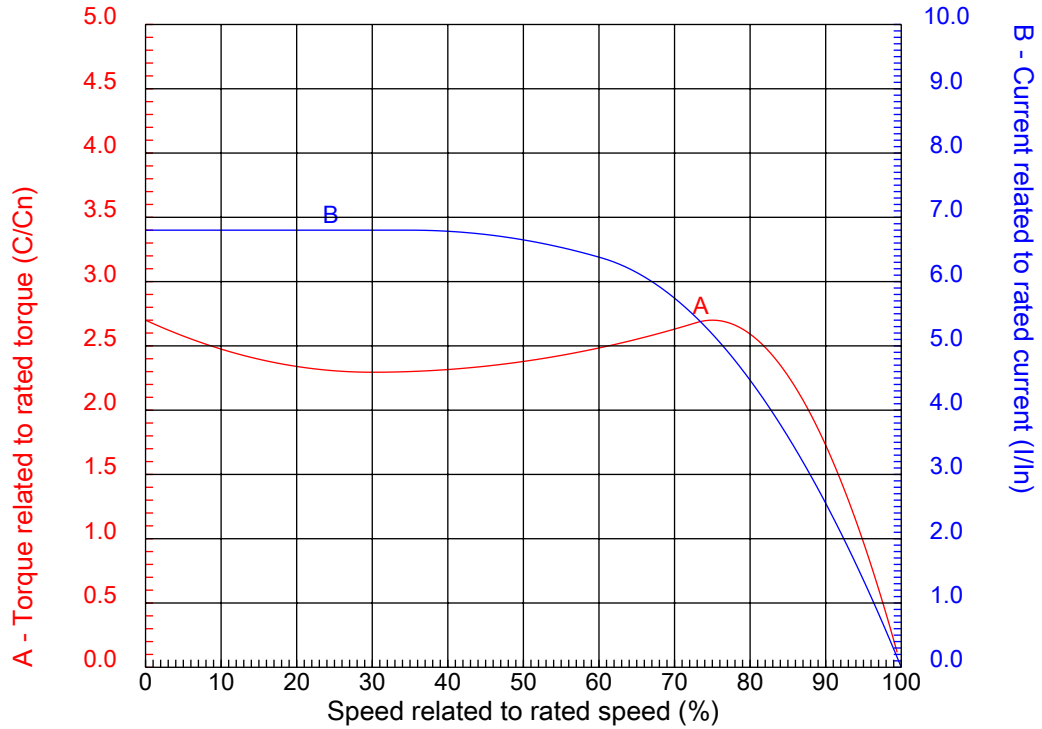

Customer :
Product line : Three-Phase : IEC Tru-Metric - TEFC (IP55) - Aluminum Frame

Frame : 71	Locked rotor current (I _l /I _n) : 6.8
Output : 0.5 HP	Duty cycle : S1
Frequency : 60 Hz	Service factor : 1.15
Full load speed : 3420 rpm	Design : ---
Voltage : 230/460 V	Locked rotor torque : 270 %
Rated current : 1.65/0.826 A	Breakdown torque : 270 %
Insulation class : F	

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #.3736EP3EAL71

Performed by

Checked