




# Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

## CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

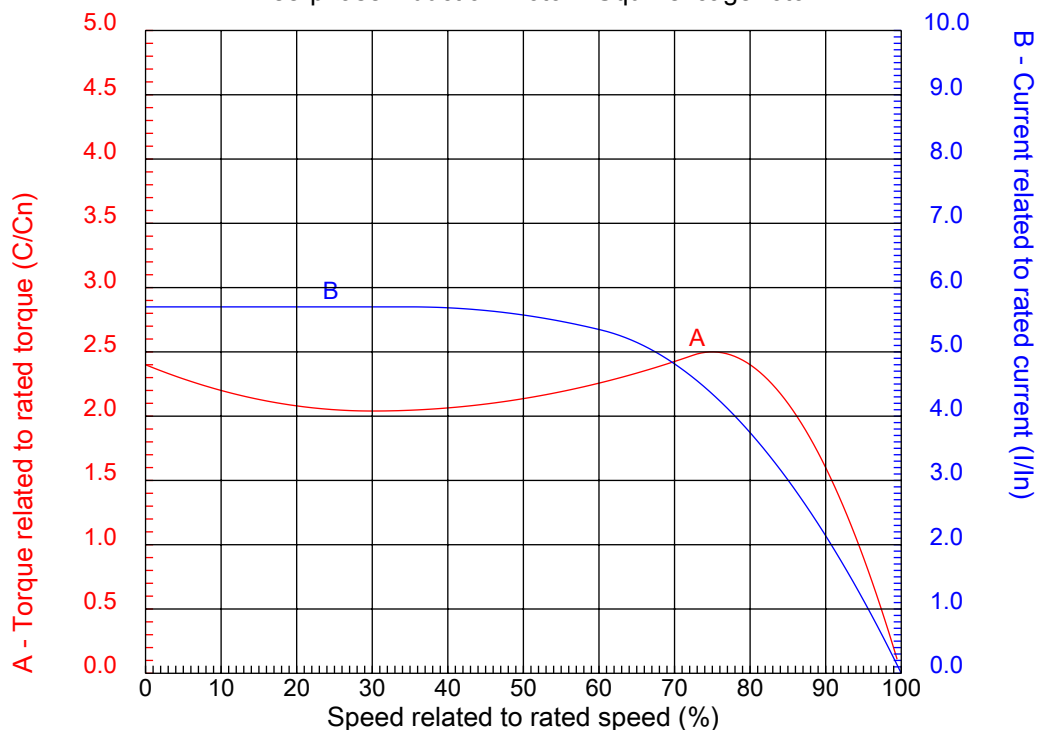

Customer :  
Product line : Three-Phase : NEMA 56 Frames - ODP

|                  |                    |  |                       |
|------------------|--------------------|--|-----------------------|
| Frame            | : B56              | Locked rotor current (I <sub>l</sub> /I <sub>n</sub> ) | : 5.7                 |
| Output           | : 0.75 HP          | Duty cycle   | : S1                  |
| Frequency        | : 60 Hz            | Service factor   | : 1.25 (1.00 at 208V) |
| Full load speed  | : 3450 rpm         | Design   | : A                   |
| Voltage          | : 208-230/460 V    | Locked rotor torque                                    | : 240 %               |
| Rated current    | : 2.45-2.39/1.20 A | Breakdown torque                                       | : 250 %               |
| Insulation class | : B                |  |                       |

Notes:  
Downloaded from <http://dealerselectric.com>  
Generated for Model #.7536OS3EB56C

Performed by

Checked