




CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

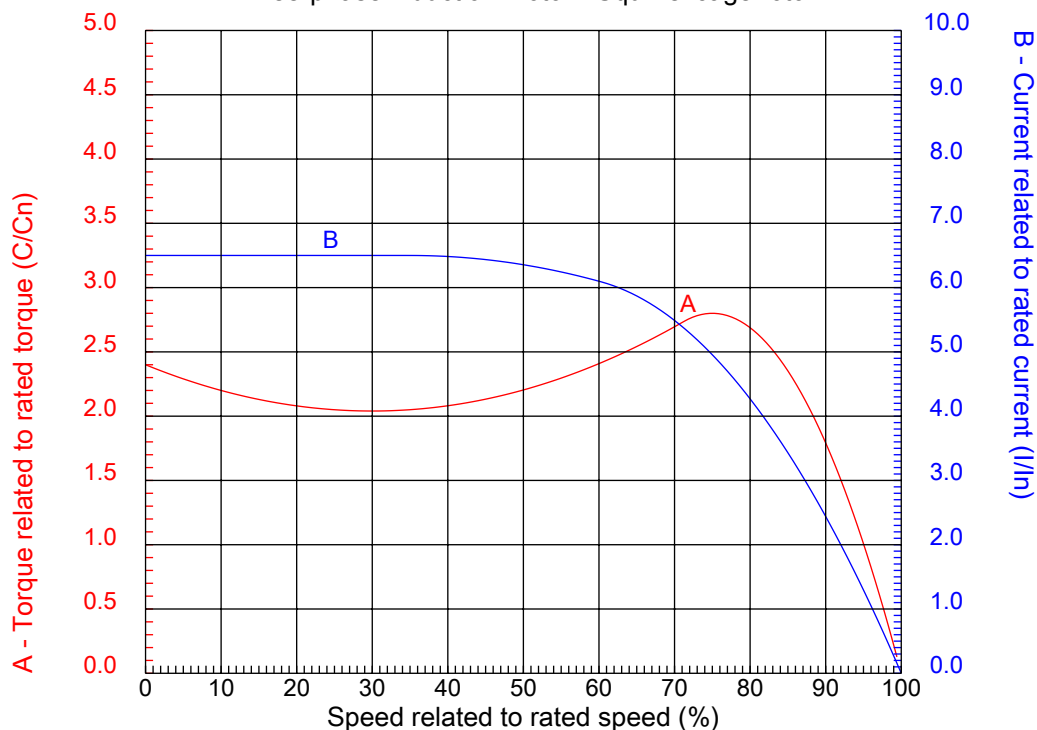

Customer	:	
Product line	:	Three Phase: W01 (Rolled Steel) - ODP - Premium Efficiency (DOE)

Frame	:	56	Locked rotor current (I _l /I _n)	:	6.5
Output	:	0.75 HP	Duty cycle	:	S1
Frequency	:	60 Hz	Service factor	:	1.25
Full load speed	:	3485 rpm	Design	:	A
Voltage	:	208-230/460 V	Locked rotor torque	:	240 %
Rated current	:	2.52-2.28/1.14 A	Breakdown torque	:	280 %
Insulation class	:	F			

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #.7536OT3E56-S

Performed by

Checked