




# Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

## CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

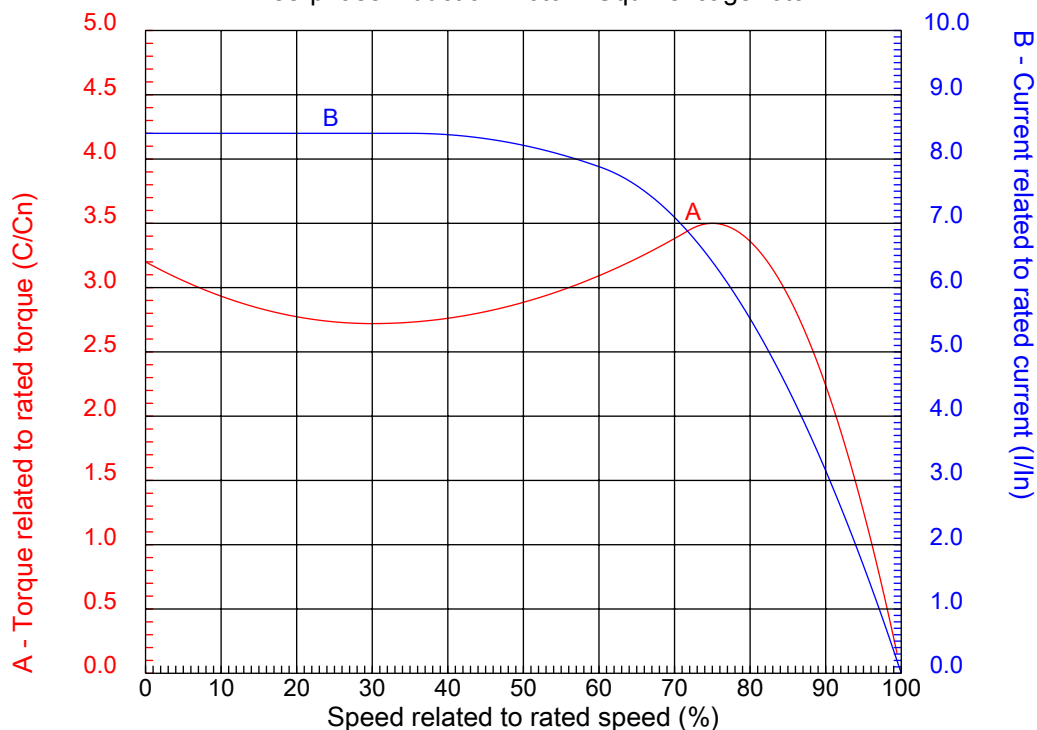

Customer :  
Product line : Close Coupled Pump: Three-Phase - W22 "JM" Type - TEFC - NEMA Premium

|                  |                    |  |         |
|------------------|--------------------|--|---------|
| Frame            | : 143/5JM          | Locked rotor current (I <sub>l</sub> /I <sub>n</sub> ) | : 8.4   |
| Output           | : 1 HP             | Duty cycle   | : S1    |
| Frequency        | : 60 Hz            | Service factor   | : 1.25  |
| Full load speed  | : 1760 rpm         | Design   | : B     |
| Voltage          | : 208-230/460 V    | Locked rotor torque                                    | : 320 % |
| Rated current    | : 3.07-2.94/1.47 A | Breakdown torque                                       | : 350 % |
| Insulation class | : F                |  |         |

Notes:  
Downloaded from <http://dealerselectric.com>  
Generated for Model #00118ET3E143JM-W22

Performed by

Checked