




# Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

## CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

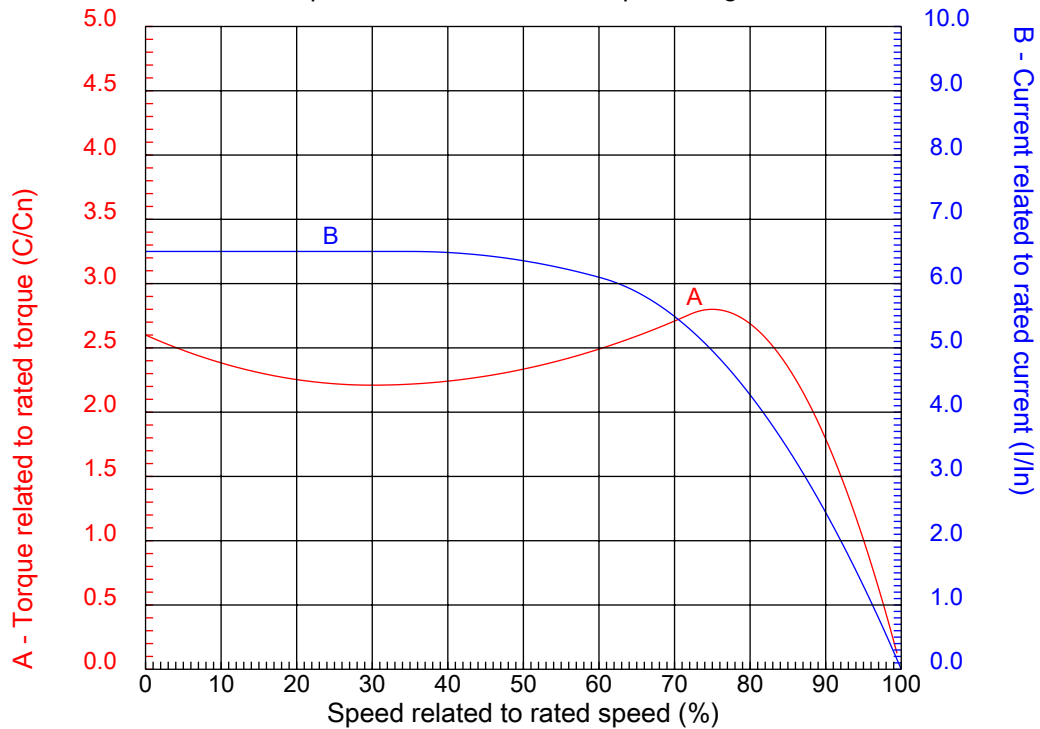

Customer :  
Product line : Three-Phase : NEMA 56 Frames - ODP

|                  |                 |  |                       |
|------------------|-----------------|--|-----------------------|
| Frame            | : B56           | Locked rotor current (I <sub>l</sub> /I <sub>n</sub> ) | : 6.5                 |
| Output           | : 1 HP          | Duty cycle   | : S1                  |
| Frequency        | : 60 Hz         | Service factor   | : 1.25 (1.00 at 208V) |
| Full load speed  | : 3470 rpm      | Design   | : A                   |
| Voltage          | : 208-230/460 V | Locked rotor torque                                    | : 260 %               |
| Rated current    | : 3.11/1.55 A   | Breakdown torque                                       | : 280 %               |
| Insulation class | : B             |  |                       |

Notes:  
Downloaded from <http://dealerselectric.com>  
Generated for Model #00136OS3EB56CFL

Performed by

Checked