




CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

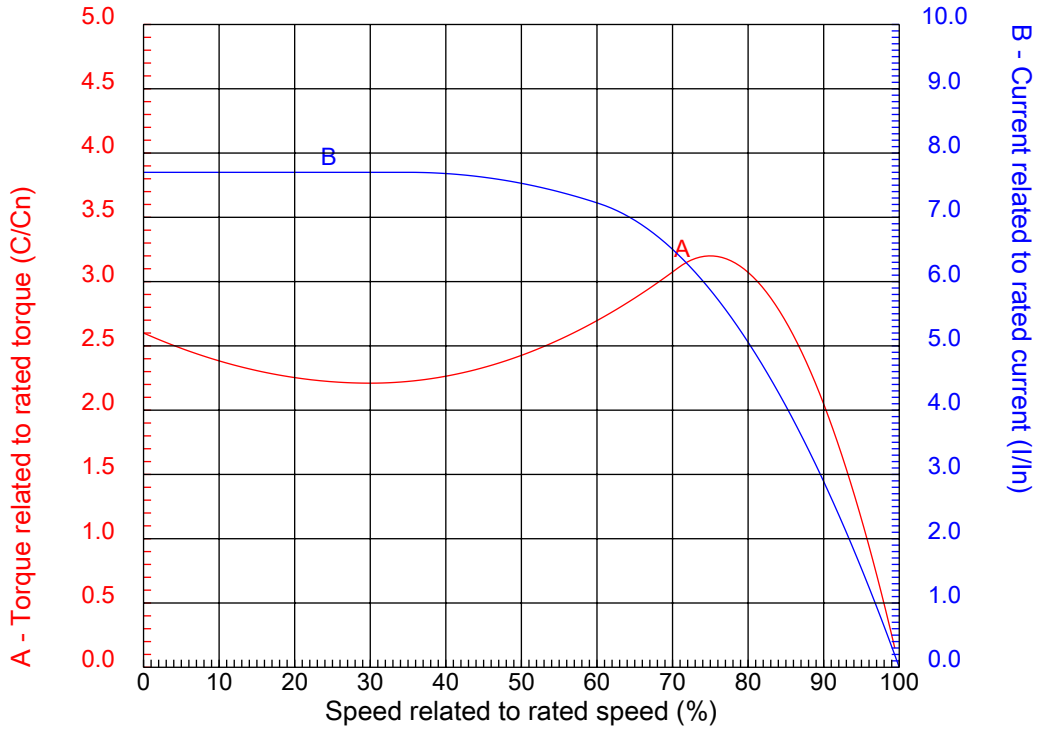

Customer :
Product line : Three Phase: W01 (Rolled Steel) - ODP - Premium Efficiency (DOE)

| | | | |
|------------------|--------------------|--|---------|
| Frame | : 56H | Locked rotor current (I _l /I _n) | : 7.7 |
| Output | : 2 HP | Duty cycle | : S1 |
| Frequency | : 60 Hz | Service factor | : 1.15 |
| Full load speed | : 1740 rpm | Design | : A |
| Voltage | : 208-230/460 V | Locked rotor torque | : 260 % |
| Rated current | : 5.95-5.38/2.69 A | Breakdown torque | : 320 % |
| Insulation class | : F | | |

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #00218OT3E56-S

Performed by

Checked