




Dealers Industrial Equipment

No.:

Date: 13-SEP-2016

CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

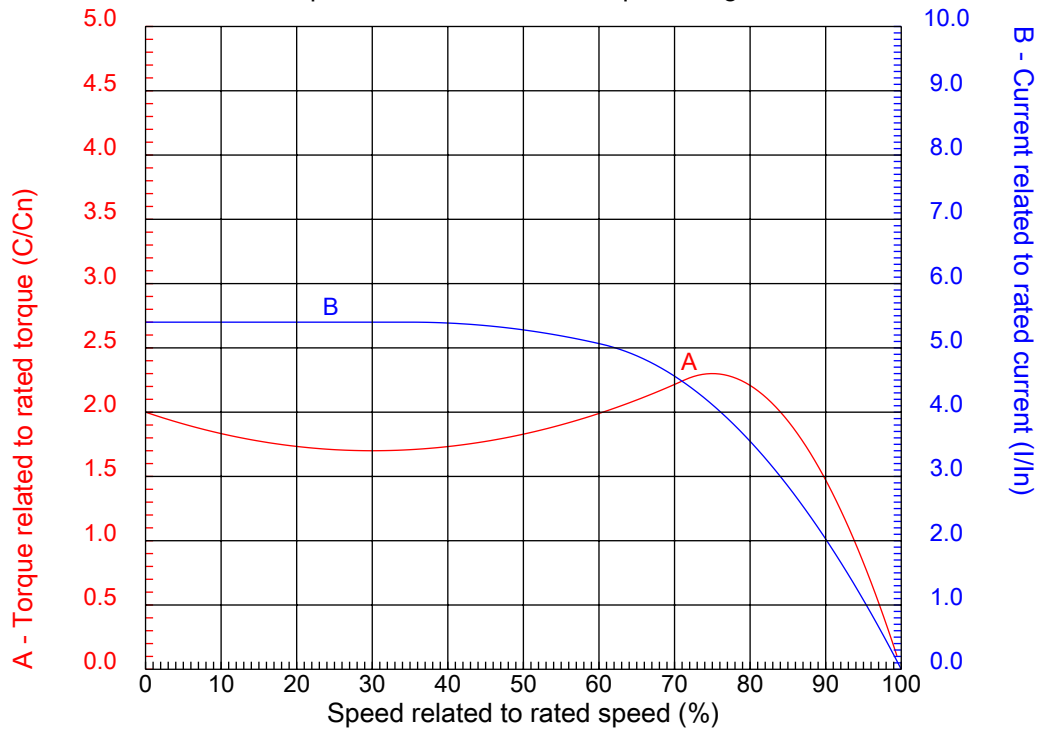

Customer	:	
Product line	:	Three Phase: W01 (Rolled Steel) - TEFC - NEMA Premium Efficiency

Frame	:	254/6T	Locked rotor current (I _l /I _h)	:	5.4
Output	:	7.5 HP	Duty cycle	:	S1
Frequency	:	60 Hz	Service factor	:	1.15
Full load speed	:	1175 rpm	Design	:	B
Voltage	:	208-230/460 V	Locked rotor torque	:	200 %
Rated current	:	22.1-20.0/9.98 A	Breakdown torque	:	230 %
Insulation class	:	F			

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #00712ET3E254T-S

Performed by

Checked