




## CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

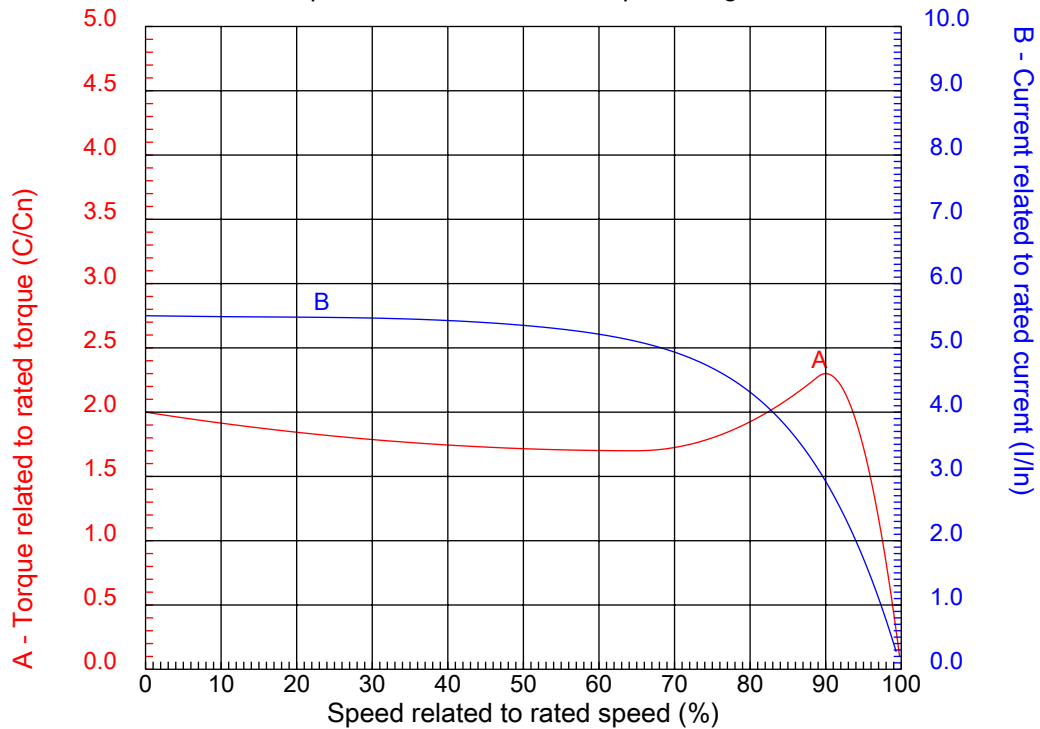

Customer :  
Product line : W22 NEMA Premium - Ball Bearings

|                  |                    |  |         |
|------------------|--------------------|--|---------|
| Frame            | : 284/6T           | Locked rotor current (I <sub>l</sub> /I <sub>n</sub> ) | : 5.5   |
| Output           | : 15 HP            | Duty cycle   | : S1    |
| Frequency        | : 60 Hz            | Service factor   | : 1.25  |
| Full load speed  | : 880 rpm          | Design   | : B     |
| Voltage          | : 208-230/460 V    | Locked rotor torque                                    | : 200 % |
| Rated current    | : 42.9-38.8/19.4 A | Breakdown torque                                       | : 230 % |
| Insulation class | : F                |  |         |

Notes:  
Downloaded from <http://dealerselectric.com>  
Generated for Model #01509ET3E286T-W22

Performed by

Checked