




Dealers Industrial Equipment

No.:

Date: 23-SEP-2016

CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

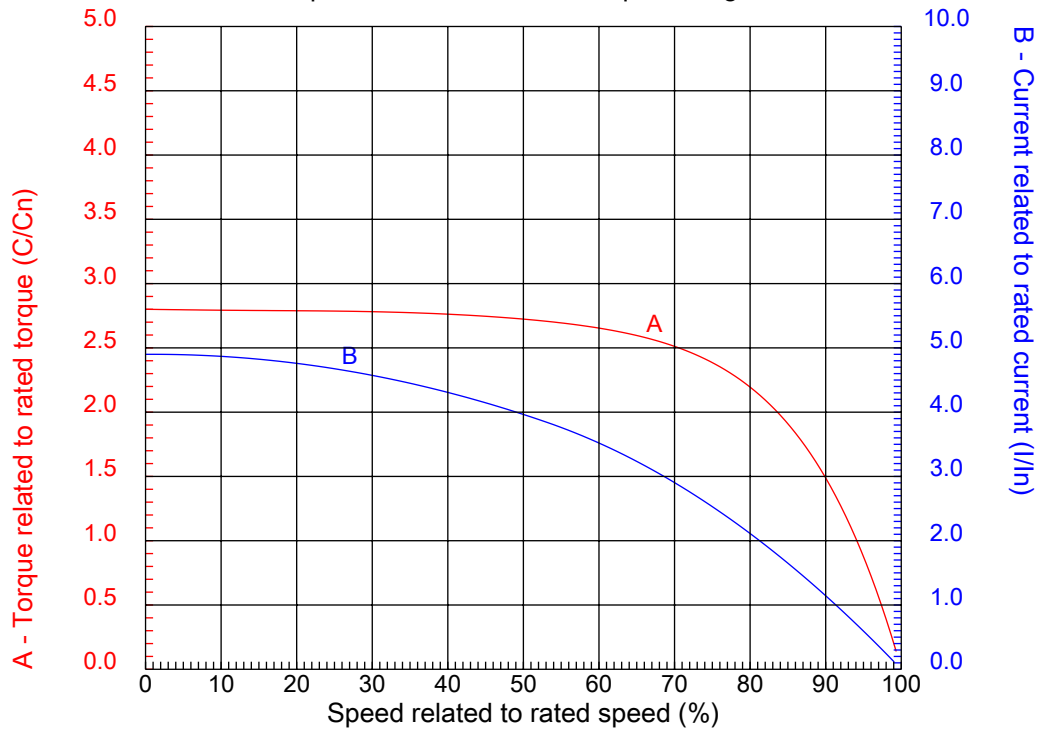

Customer :
Product line : W22 Oil Well Pumping : High Slip - NEMA Design "D" - TEFC (IP55)

| | | | |
|------------------|--------------------|--|---------|
| Frame | : 324/6T | Locked rotor current (I _l /I _n) | : 4.9 |
| Output | : 20 HP | Duty cycle | : S1 |
| Frequency | : 60 Hz | Service factor | : 1.15 |
| Full load speed | : 840 rpm | Design | : D |
| Voltage | : 208-230/460 V | Locked rotor torque | : 280 % |
| Rated current | : 59.4-59.6/29.8 A | Breakdown torque | : 238 % |
| Insulation class | : F | | |

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #02009ES3EOW326T-W22

Performed by

Checked