




CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

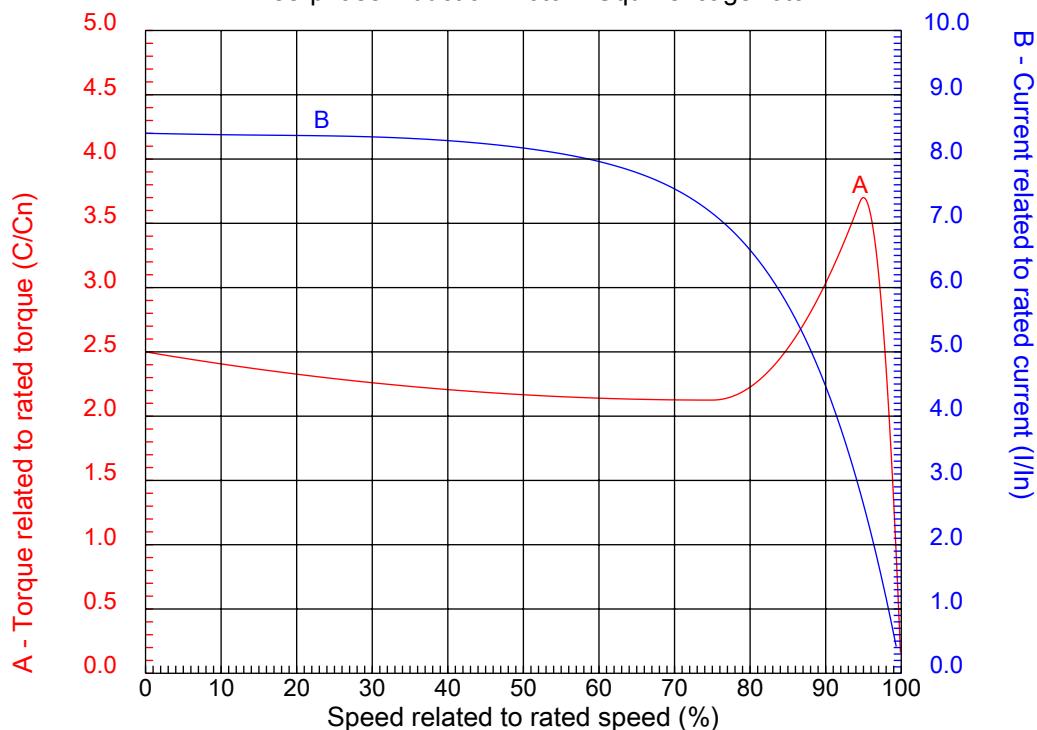

Customer :
Product line : Three-Phase: W22 IE3 IEC Tru-Metric - TEFC (IP55) Cast Iron Frame

| | | | |
|------------------|------------|--|---------|
| Frame | : 315S/M | Locked rotor current (I _l /I _n) | : 8.4 |
| Output | : 150 HP | Duty cycle | : S1 |
| Frequency | : 60 Hz | Service factor | : 1.25 |
| Full load speed | : 3585 rpm | Design | : --- |
| Voltage | : 460 V | Locked rotor torque | : 250 % |
| Rated current | : 163 A | Breakdown torque | : 370 % |
| Insulation class | : F | | |

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #11036ET3Y315S/M-W22

Performed by

Checked