



Dealers Industrial Equipment

No.:

Date: 27-SEP-2016

Customer :

TECHNICAL PROPOSAL

Three-phase induction motor - Squirrel cage rotor

Product line : P-Base Motors : High Efficiency

Catalog Number : -

List Price : \$-

Notes:

Downloaded from <http://dealerselectric.com>

Generated for Model #06018EP3E326HP

Performed by:

Checked:



Dealers Industrial Equipment

No.:

Date: 27-SEP-2016

DATA SHEET Three-phase induction motor - Squirrel cage rotor

Customer :
Product line : P-Base Motors : High Efficiency

Frame : 326HP
Output : 60 HP
Frequency : 60 Hz
Poles : 4
Full load speed : 1770 rpm
Slip : 1.67 %
Voltage : 230/460 V
Rated current : 142/71.0 A
Locked rotor current : 923/462 A
Locked rotor current (I_L/I_n) : 6.5
No-load current : 45.0/22.5 A
Full load torque : 176 lb.ft
Locked rotor torque : 210 %
Breakdown torque : 230 %
Design : B
Insulation class : F
Temperature rise : 80 K
Locked rotor time : 20 s (hot)
Service factor : 1.25
Duty cycle : S1
Ambient temperature : -20°C - +40°C
Altitude : 1000 m
Degree of Protection : IP55
Approximate weight : 849 lb
Moment of inertia : 9.1624 sq.ft.lb
Noise level : 71 dB(A)

	D.E.	N.D.E.
Bearings	6314 C3	6212 C3
Regreasing interval	9790 h	10000 h
Grease amount	27 g	13 g

Load	Power factor	Efficiency (%)
100%	0.85	93.6
75%	0.83	93.6
50%	0.75	91.7

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #06018EP3E326HP

Performed by

Checked




Dealers Industrial Equipment

No.:

Date: 27-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

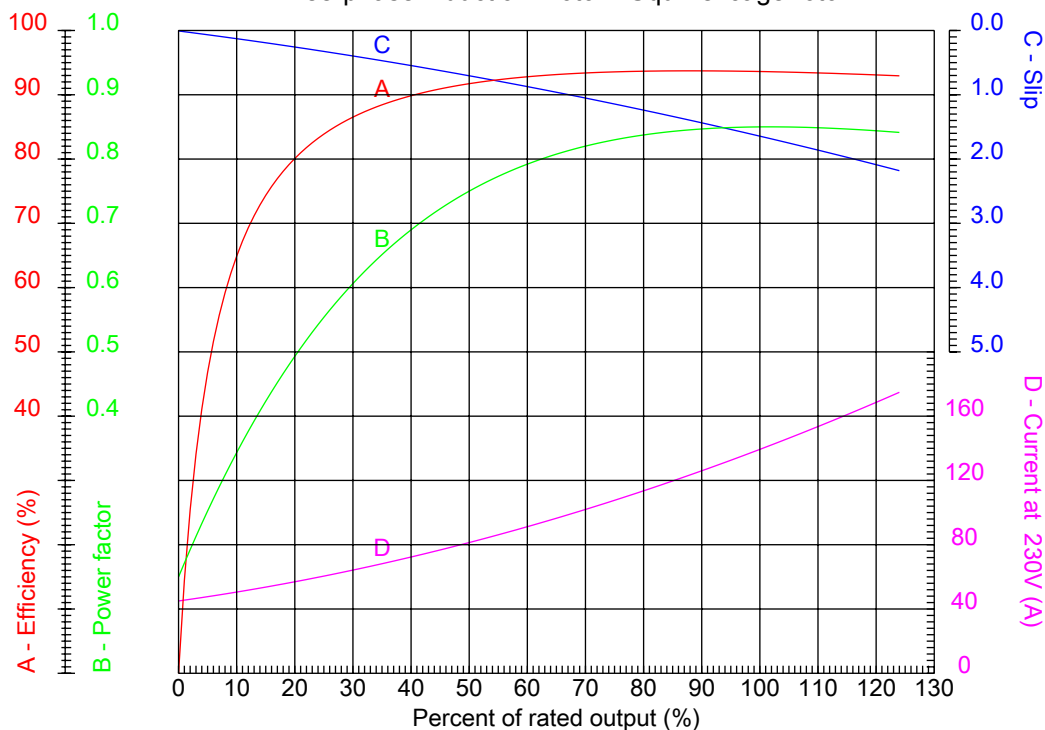

Customer :
 Product line : P-Base Motors : High Efficiency

Frame	: 326HP	Locked rotor current (I _l /I _n)	: 6.5
Output	: 60 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.25
Full load speed	: 1770 rpm	Design	: B
Voltage	: 230/460 V	Locked rotor torque	: 210 %
Rated current	: 142/71.0 A	Breakdown torque	: 230 %
Insulation class	: F		

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #06018EP3E326HP

Performed by

Checked




Dealers Industrial Equipment

No.:

Date: 27-SEP-2016

CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

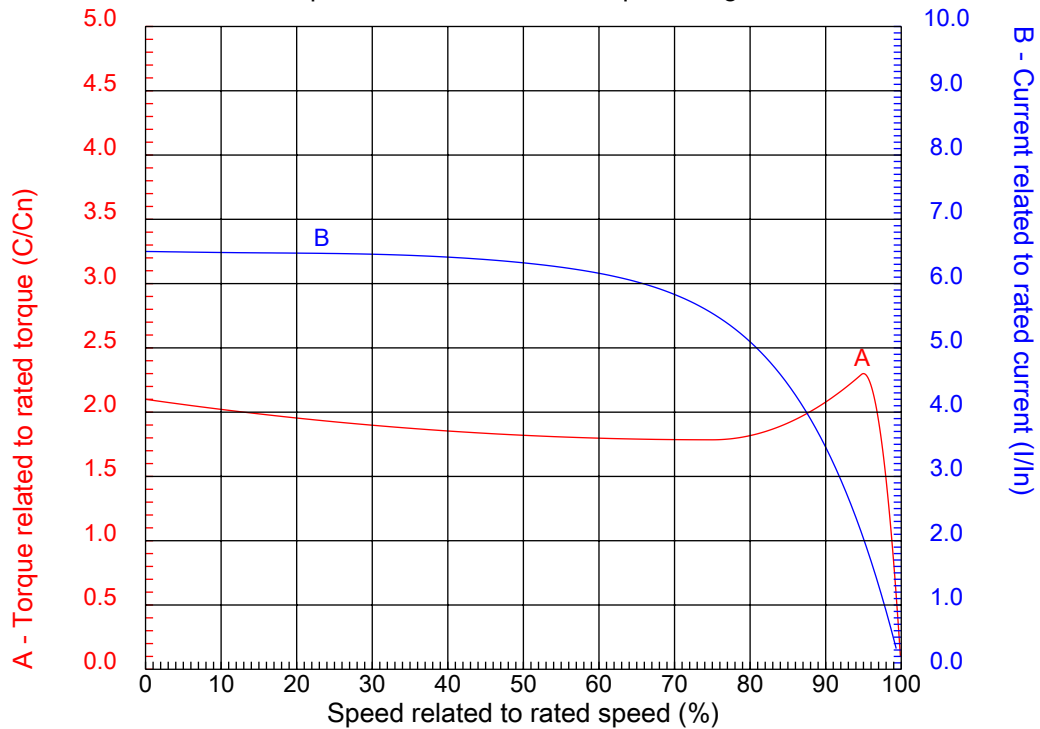

Customer :
Product line : P-Base Motors : High Efficiency

Frame	: 326HP	Locked rotor current (I/I _n)	: 6.5
Output	: 60 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.25
Full load speed	: 1770 rpm	Design	: B
Voltage	: 230/460 V	Locked rotor torque	: 210 %
Rated current	: 142/71.0 A	Breakdown torque	: 230 %
Insulation class	: F		

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #06018EP3E326HP

Performed by

Checked

1 2 3 4 5 6 7 8

A


B

C

D

E

F

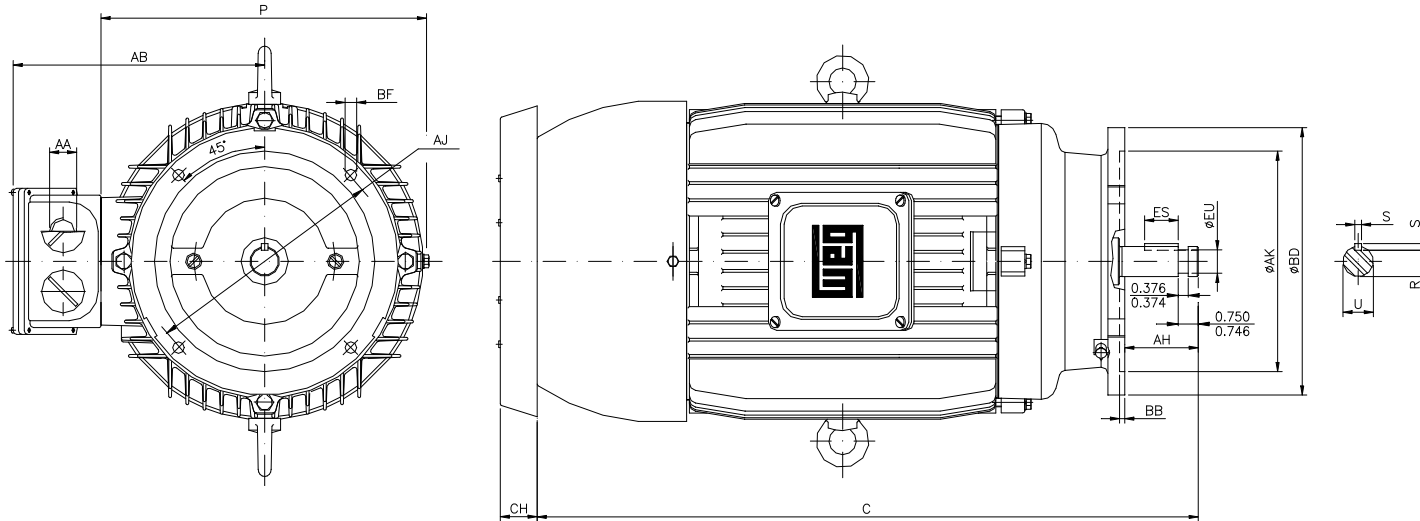

Notes: Downloaded from <http://dealerselectric.com>
Generated for Model #06018EP3E326HP

Performed by:

Checked:

Customer:

P-Base Motors : High Efficiency

ES 3.150	S 0.375	BB 0.000	EU 1.250	U 1.625
R 1.415	P 15.591	AH 4.500	AB 11.496	C 31.897
CH 2.634	AA NPT 2"			

Three-phase induction motor
Frame 326HP - IP55

27-SEP-2016

