PRODUCT INFORMATION PACKET



Model No: C241
Catalog No: C241
3 HP Circulator nump Motor 1 phase 1800 PPI

1/2 HP Circulator pump Motor, 1 phase, 1800 RPM, 115/230 V, 56Y Frame, ODP

Circulator Pump Motors





Regal and Century are trademarks of Regal Beloit Corporation or one of its affiliated companies.

©2019 Regal Beloit Corporation, All Rights Reserved. MC017097E



Nameplate Specifications


Output HP	1/2 Hp	Output KW	0.37 kW	
Frequency	60 Hz	Voltage	115/230 V	
Current	9.6/4.8 A	Speed	1725 rpm	
Service Factor	1.25	Phase	1	
Duty	Continuous	Insulation Class	В	
Frame	Y56Y	Enclosure	Drip Proof	
Thermal Protection	Thermally Protected	Ambient Temperature	40 °C	
UL	Recognized	CSA	Υ	
CE	N			

Technical Specifications

Electrical Type	Capacitor Start, Induction Run, Low Starting Torque, Single Or Dual Voltage	Starting Method	Across The Line
Poles	4	Rotation	Clockwise
Mounting	Cushion Ring	Drive End Bearing	Sleeve
Opp Drive End Bearing	Sleeve	Frame Material	Rolled Steel
Shaft Type	Keyed	Overall Length	10.53 in
Frame Length	5.29 in	Shaft Diameter	0.625 in
Shaft Extension	1.18 in		

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:04/11/2019

C241

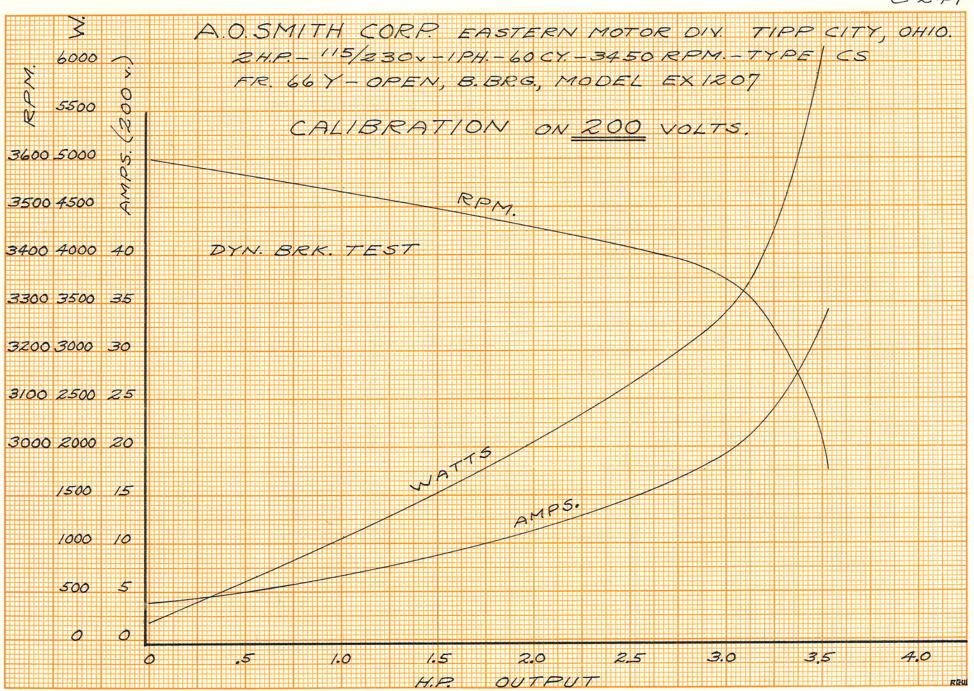

C241