

PRODUCT INFORMATION PACKET



Model No: C347
Catalog No: C347
3/4 HP Auger Drive Motor, 3 phase, 1800 RPM, 208-230/460 V, 56N Frame, TEFC
Auger Drive Motors



Regal and Century are trademarks of Regal Beloit Corporation or one of its affiliated companies.
©2019 Regal Beloit Corporation, All Rights Reserved. MC017097E





Nameplate Specifications

Output HP	3/4 Hp	Output KW	0.56 kW
Frequency	60 Hz	Voltage	208-230/460 V
Current	2.4-2.4/1.2 A	Speed	1725 rpm
Service Factor	1	Phase	3
Duty	Continuous	Insulation Class	B
Frame	56N	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	Thermally Protected	Ambient Temperature	40 °C
UL	Recognized	CSA	Y
CE	N		

Technical Specifications

Electrical Type	Polyphase	Starting Method	Across The Line
Poles	4	Rotation	Reversible Counterclockwise
Mounting	Round	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	Flat	Overall Length	10.78 in
Frame Length	5.13 in	Shaft Diameter	0.500 in
Shaft Extension	1.75 in		


This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:30/10/2019

A.O. SMITH CORP.
ELECTRIC MOTOR DIVISION

7 1/2 HP 220V 60 Hz 4-POLE 1750 RPM 3PH HERMETIC

PERFORMANCE CURVES

TESTED AT 253V

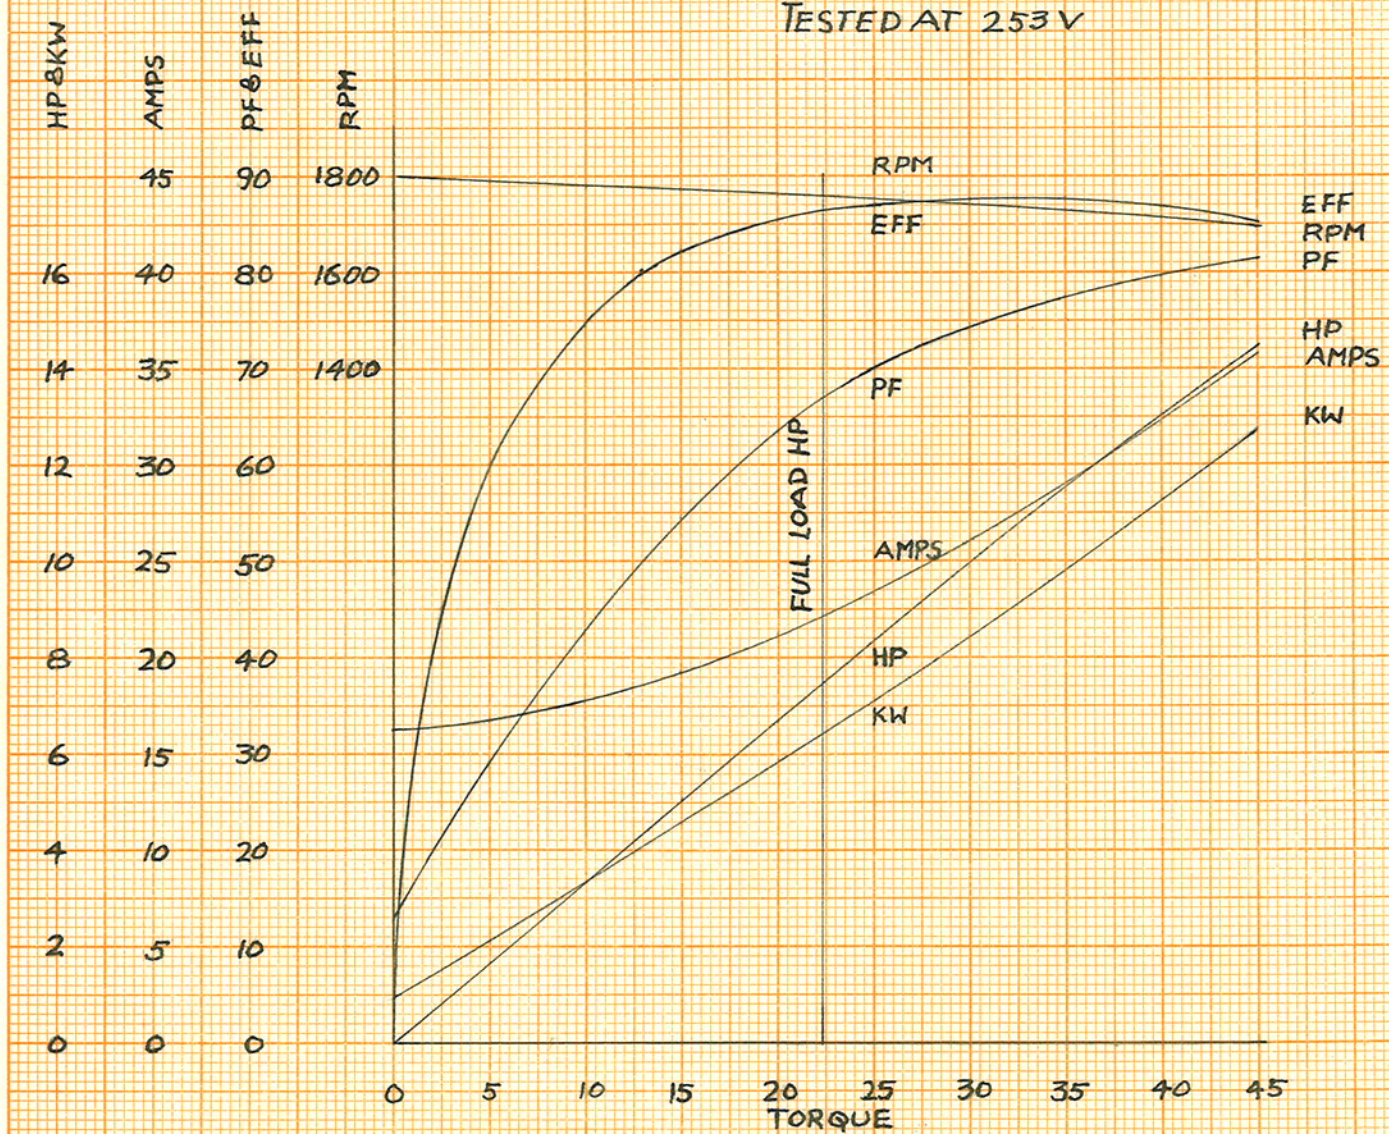

ST. T. = 104 LB FT
ST. A. = 158 AMPS
BDT = 100 LB FT

DGD 6-22-55

C 347