

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer : Dealers Industrial Equipment 800-469-3110
Customer reference : 14829358

Product line : W40 JP Pump High Efficiency Three-Phase Product code : 14829358
Catalog # : 05018OP3VFP326JPV-W4

Frame	: 324/6JP	Locked rotor time	: 27s (cold) 15s (hot)
Output	: 50 HP (37 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 200/400 V	Altitude	: 1000 m.a.s.l.
Rated current	: 138/69.2 A	Protection degree	: IP23
L. R. Amperes	: 831/415 A	Cooling method	: IC01 - ODP
LRC	: 6.0x(Code G)	Mounting	: W-6
No load current	: 61.6/30.8 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 1775 rpm	Starting method	: Direct On Line
Slip	: 1.39 %	Approx. weight ³	: 498 lb
Rated torque	: 146 ft.lb		
Locked rotor torque	: 240 %		
Breakdown torque	: 229 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 5.98 sq.ft.lb		
Design	: B		

Output	25%	50%	75%	100%	Foundation loads
Efficiency (%)	92.2	92.4	93.0	93.0	Max. traction
Power Factor	0.41	0.67	0.78	0.83	Max. compression

	Drive end	Non drive end
Bearing type	: 6312 Z C3	: 6211 Z C3
Sealing	: Without Bearing Seal	: Without Bearing Seal
Lubrication interval	: 20000 h	: 20000 h
Lubricant amount	: 21 g	: 11 g
Lubricant type	Mobil Polyrex EM	

Notes
downloaded from <http://dealerselectric.com>


This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight subject to changes after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	16/04/2019			
			Page	Revision
			1 / 2	

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : Dealers Industrial Equipment 800-469-3110
Customer reference : 14829358

Product line : W40 JP Pump High Efficiency
Three-Phase

Product code : 14829358

Catalog # : 05018OP3VFP326JPV-W4

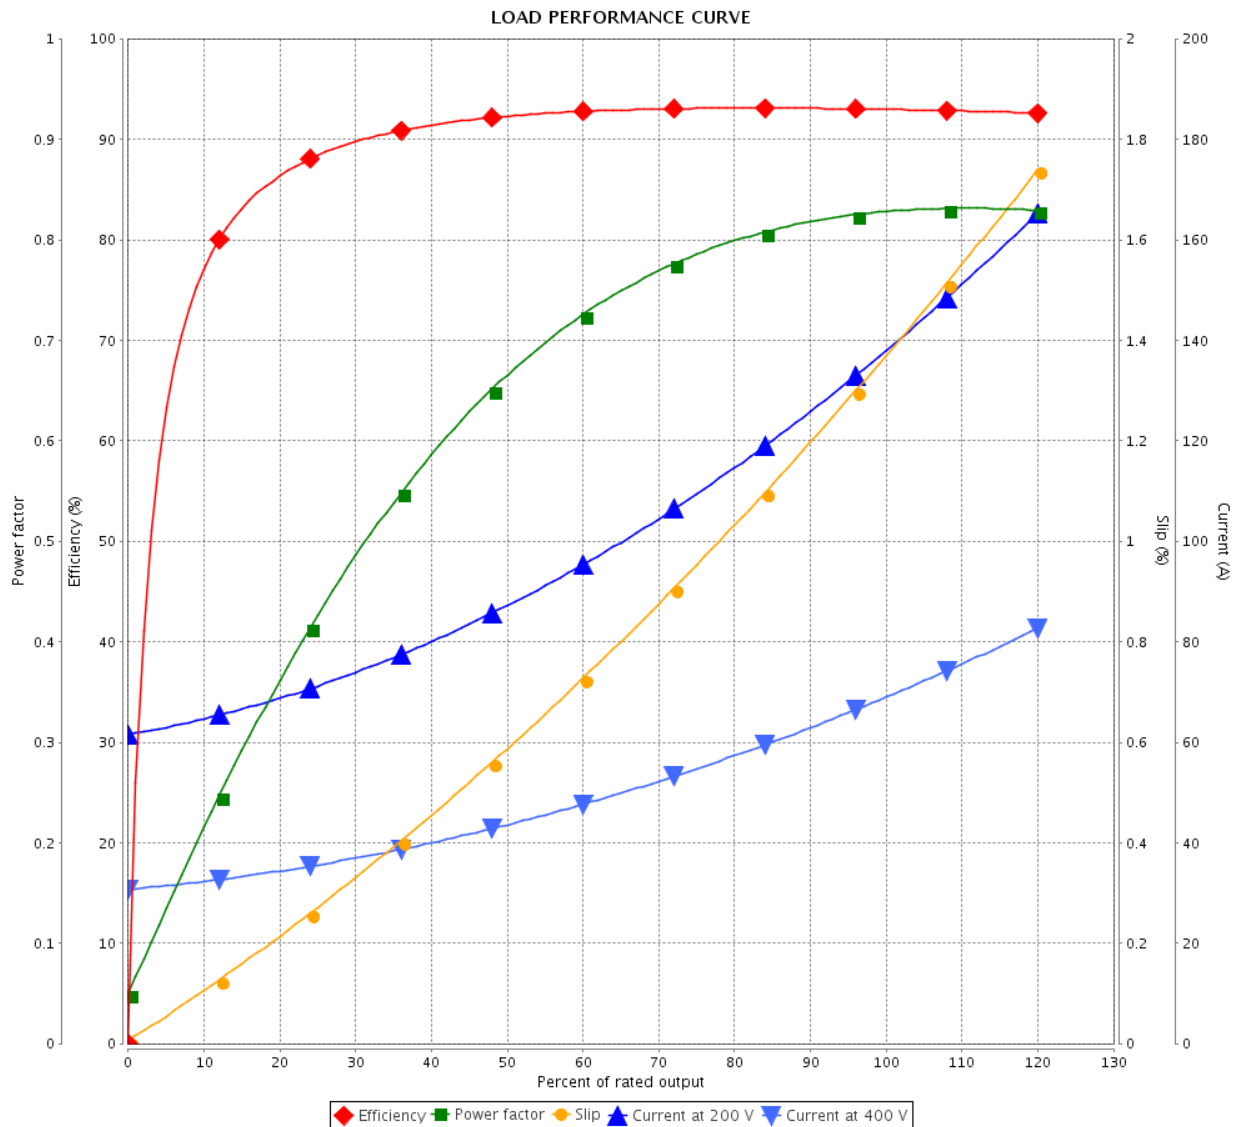


Performance : 200/400 V 60 Hz 4P

Rated current : 138/69.2 A
LRC : 6.0
Rated torque : 146 ft.lb
Locked rotor torque : 240 %
Breakdown torque : 229 %
Rated speed : 1775 rpm


Moment of inertia (J) : 5.98 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 2 / 2Revision		
Checked by				
Date	16/04/2019			

THIS IS AN UPDATED REVISION, THE
PREVIOUS ONE MUST BE DISREGARDED.

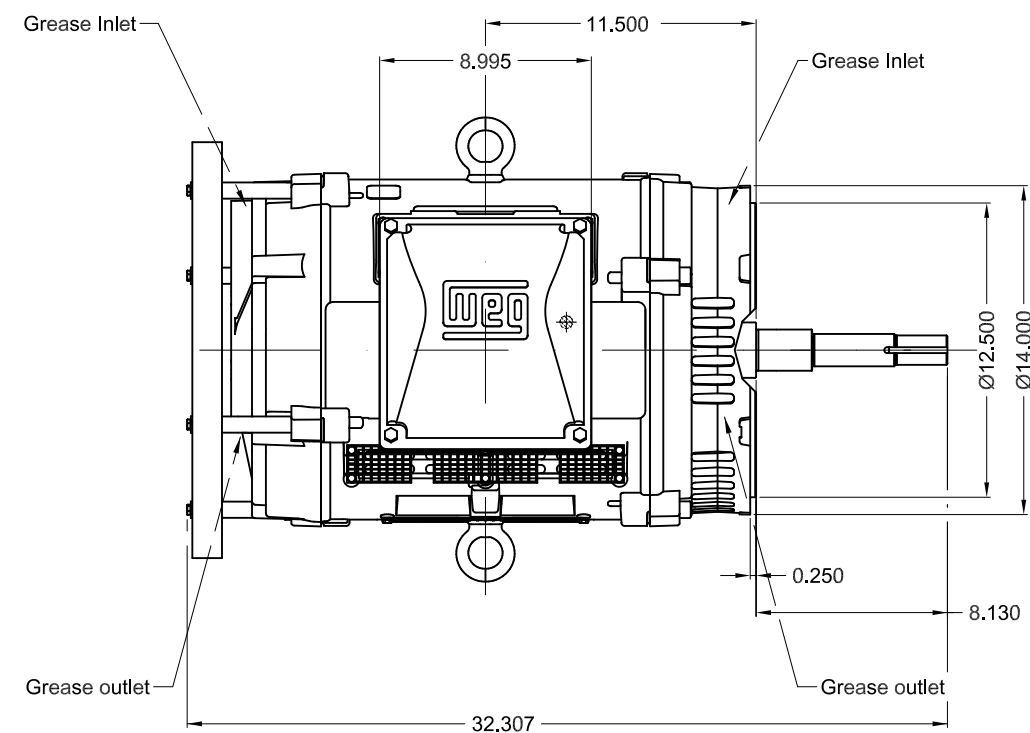

SCALE	1:8
-------	-----

ECM	LOC	SUMMARY OF MODIFICATIONS		EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	USERADMIN		THREE PHASE W40 MOTOR HIGH EFF					
CHECKED			FRAME 324/6JP IP23 ODP					
RELEASED			CLOSE COUPLED PUMP JP TYPE W					
REL DT	16.04.2019	WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1		

50 HP 04 Poles 60Hz

A

WEG's property. Forbidden reproduction without previous authorization.

ZME A3