



Dealers Industrial Equipment

No.:

Date: 29-SEP-2016

Customer :

TECHNICAL PROPOSAL

Single-phase induction motor - Squirrel cage rotor

Product line : Pool & Spa Motors : C-Face - Start Capacitor - Low Service Factor

Catalog Number : PCJ125

List Price : \$486

Notes:

Downloaded from <http://dealerselectric.com>

Generated for Model #PCJ125

Performed by:

Checked:



# Dealers Industrial Equipment

No.:

Date: 29-SEP-2016

## DATA SHEET Single-phase induction motor - Squirrel cage rotor

Customer :  
Product line : Pool & Spa Motors : C-Face - Start Capacitor - Low Service Factor

Frame : M56J  
Output : 2.5 HP  
Frequency : 60 Hz  
Poles : 2  
Full load speed : 3450 rpm  
Slip : 4.17 %  
Voltage : 230 V  
Rated current : 10.8 A  
Locked rotor current : 63.7 A  
Locked rotor current (I<sub>L</sub>/I<sub>n</sub>) : 5.9  
No-load current : 4.00 A  
Full load torque : 3.75 lb.ft  
Locked rotor torque : 170 %  
Breakdown torque : 210 %  
Design : ---  
Insulation class : B  
Temperature rise : 80 K  
Locked rotor time : 6 s (hot)  
Service factor : 1.04  
Duty cycle : S1  
Ambient temperature : -20°C - +50°C  
Altitude : 1000 m  
Degree of Protection : IP21  
Approximate weight : 33 lb  
Moment of inertia : 0.04461 sq.ft.lb  
Noise level : ---

	D.E.	N.D.E.
Bearings	6203 2RS	6203 ZZ
Regreasing interval	---	---
Grease amount	---	---

Load	Power factor	Efficiency (%)
100%	0.93	80.7
75%	0.86	79.0
50%	0.81	74.0

Notes:  
Downloaded from <http://dealerselectric.com>  
Generated for Model #PCJ125

Performed by

Checked




# Dealers Industrial Equipment

No.:

Date: 29-SEP-2016

## PERFORMANCE CURVES RELATED TO RATED OUTPUT Single-phase induction motor - Squirrel cage rotor

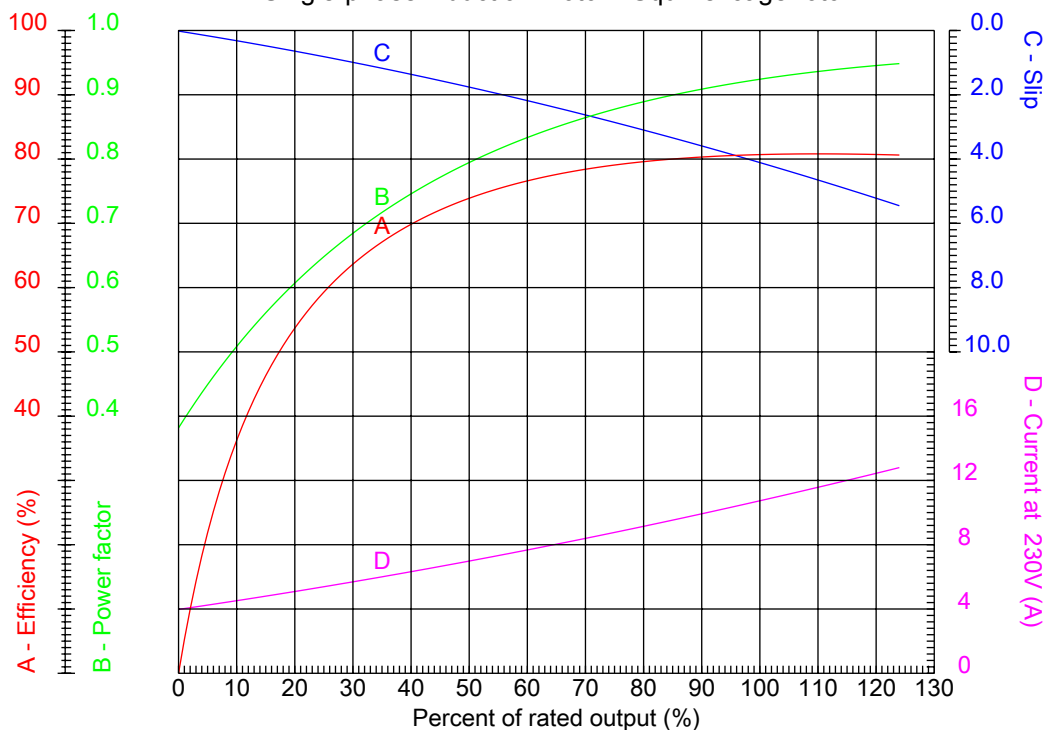


Customer :  
Product line : Pool & Spa Motors : C-Face - Start Capacitor - Low Service Factor

Frame	: M56J	Locked rotor current (I <sub>l</sub> /I <sub>n</sub> )	: 5.9
Output	: 2.5 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.04
Full load speed	: 3450 rpm	Design	: ---
Voltage	: 230 V	Locked rotor torque	: 170 %
Rated current	: 10.8 A	Breakdown torque	: 210 %
Insulation class	: B		

Notes:  
Downloaded from <http://dealerselectric.com>  
Generated for Model #PCJ125

Performed by

Checked

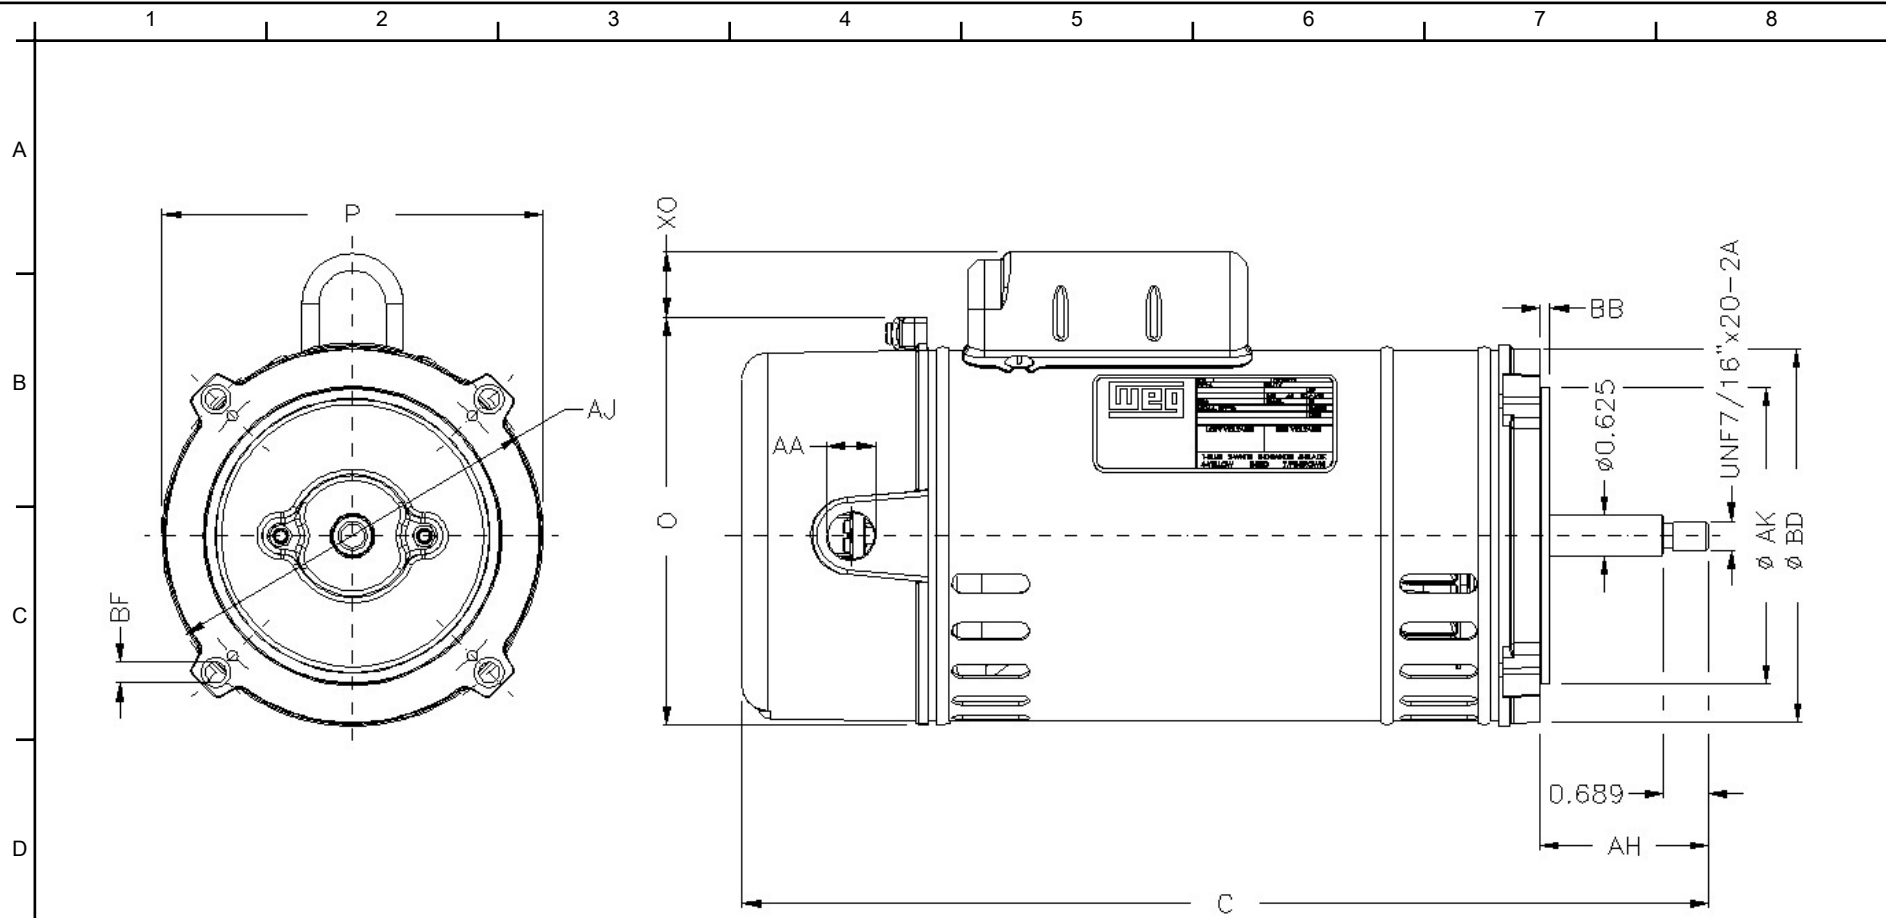

Notes: Downloaded from <http://dealerselectric.com>  
 Generated for Model #PCJ125

Performed by:

Checked:

Customer:

Pool & Spa Motors : C-Face - Start Capacitor - Low Service Factor

P	C	XO	AA	Flange
6.535	15.079	1.142	NPT 1/2"	FC-149
AJ	AK	BD	BF	BB
5.874	4.500	6.535	UNC 3/8"x16	0.157
AH				
2.563				

Single-phase induction motor  
 Frame M56J - IP21

29-SEP-2016

