




CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

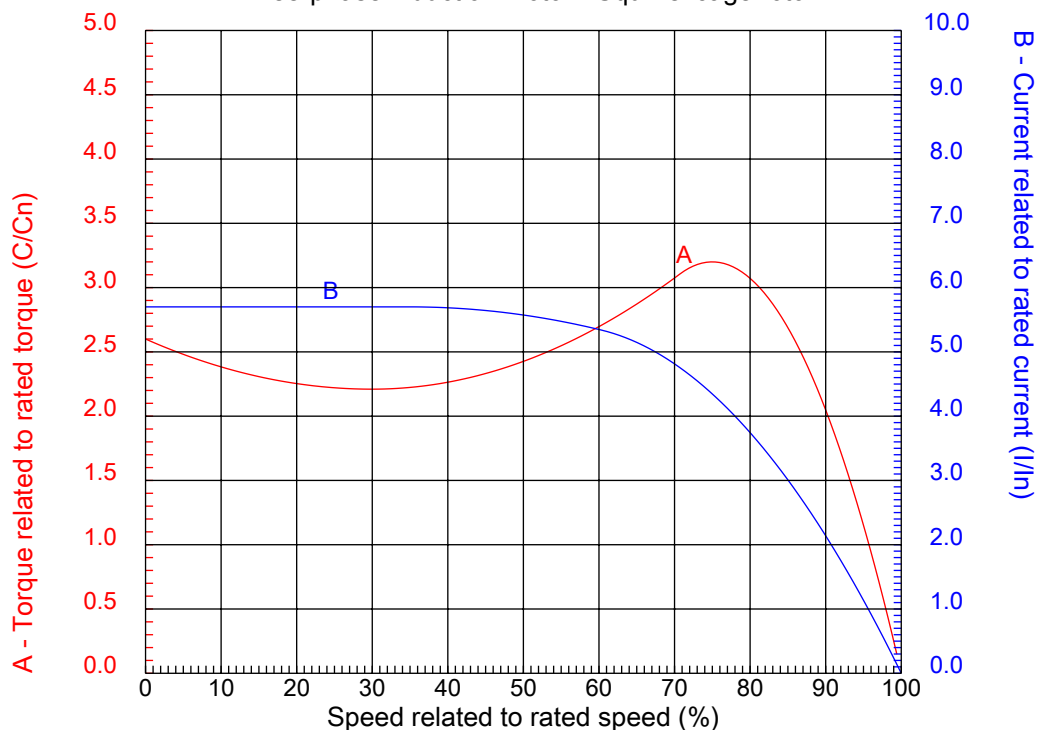

Customer :
Product line : Three-Phase : NEMA 56 Frames - ODP

| | | | |
|------------------|-----------------|--|-----------------------|
| Frame | : A56 | Locked rotor current (I _l /I _n) | : 5.7 |
| Output | : 0.33 HP | Duty cycle | : S1 |
| Frequency | : 60 Hz | Service factor | : 1.35 (1.00 at 208V) |
| Full load speed | : 3500 rpm | Design | : A |
| Voltage | : 208-230/460 V | Locked rotor torque | : 260 % |
| Rated current | : 1.40/0.698 A | Breakdown torque | : 320 % |
| Insulation class | : B | | |

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #.3336OS3EA56

Performed by

Checked