




Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

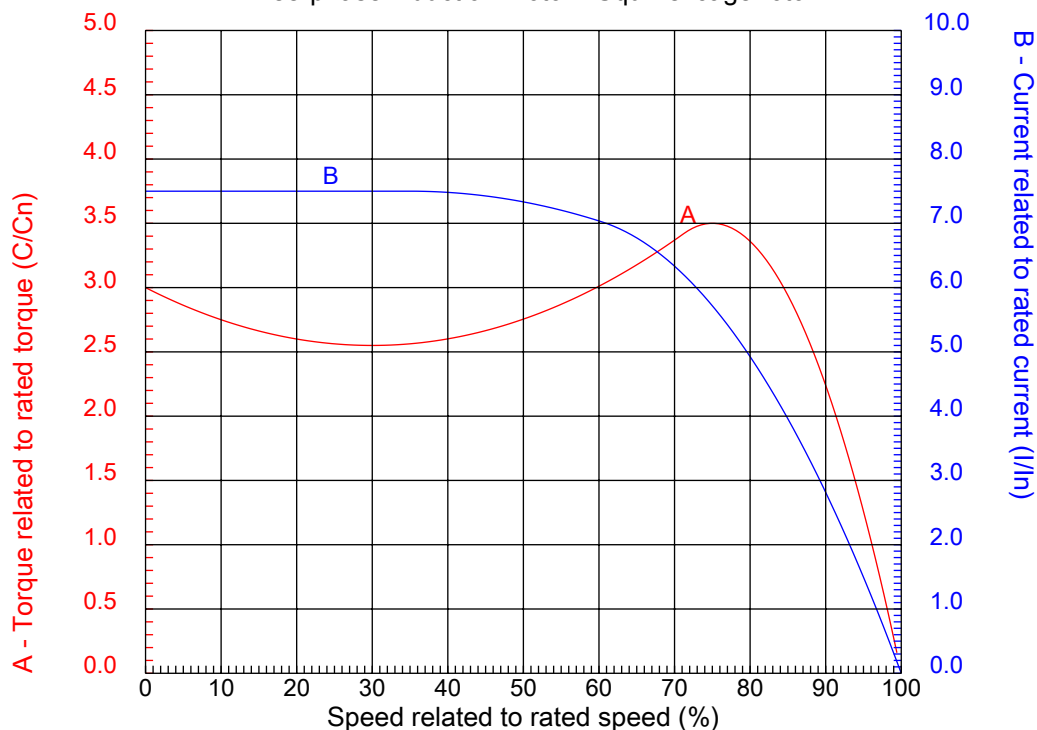

Customer :
Product line : W22 NEMA Premium - Ball Bearings

| | | | |
|------------------|--------------------|--|-----------------------|
| Frame | : 182/4T | Locked rotor current (I _l /I _n) | : 7.5 |
| Output | : 2 HP | Duty cycle | : S1 |
| Frequency | : 60 Hz | Service factor | : 1.25 (1.00 at 208V) |
| Full load speed | : 1170 rpm | Design | : B |
| Voltage | : 208-230/460 V | Locked rotor torque | : 300 % |
| Rated current | : 7.13-6.44/3.22 A | Breakdown torque | : 350 % |
| Insulation class | : F | | |

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #00212ET3E184T-W22

Performed by

Checked